

**Warewashing  
Small Glasswasher, Single Skin  
with Detergent and Rinse Aid  
Dispensers, 1 cycle, 30b/h - UK Plug**

ITEM # \_\_\_\_\_  
 MODEL # \_\_\_\_\_  
 NAME # \_\_\_\_\_  
 SIS # \_\_\_\_\_  
 AIA # \_\_\_\_\_



402104 (NGWSDDUK)

Glasswasher (small), single skin with Detergent and Rinse Aid Dispensers, 1 cycle, 30b/h-UK Plug

**Short Form Specification**

Item No. \_\_\_\_\_

Unit shall be Glasswasher type hot water rinsing for rack dimension of 400\*400mm. Electrical characteristics to be 230 V single phase operation with one wash cycle of 120 seconds. Rinse temperature and pressure guaranteed by built in pressure boiler. Washing performance is ensured by a powerful wash pump, revolving washing spray arm. Double skinned counter-balance door. 304 stainless steel construction to include door, frame, wash tank, wash and rinse arms. The unit shall include rinse aid and detergent dispensers and it is equipped with electric cable with UK plug.

**Main Features**

- Detergent dispenser for easy connection to the external detergent source.
- Built-in pressure boiler designed to raise incoming water to a guaranteed minimum temperature of 82°C for sanitizing rinse. No external booster is required.
- Washing system endowed with rotating washing arms, high powered wash pump and large capacity wash tank for professional washing.
- Maximum capacity of 30 racks per hour.
- 120 seconds cycle.
- Simple operation control panel.
- Easy service access to main components (inlet valve, boiler heating elements, control panel components, rinse aid pump and/or detergent pump) without moving the unit.
- Solid double skinned counter-balance stainless steel door with hurt-free handle in plastic for soft opening and closing. 1/4 position allows for air circulation in the machine

**Construction**

- Requires only 1 phase 230V supply.
- Completely closed on the back by a cover plate.
- Delivered with UK plug.
- Robust structure thanks to stainless steel construction.
- Internal components (arms) are easy extractable.

**Included Accessories**


- 1 of Square basket for glasses 400x400x150mm PNC 864470
- 1 of Insert for 12 saucers, 290x290x75mm PNC 867048
- 1 of Square cutlery container, 89x113x113mm PNC 867049

**Optional Accessories**


- Square basket for glasses, 400x400x1100mm  PNC 867039
- Round basket for glasses, 400x180mm  PNC 867047
- Square basket with angles for glasses 400x400x150  PNC 867067
- INCLINATION INSERT FOR GLASSES 400x400MM  PNC 867069

APPROVAL: \_\_\_\_\_

**Front**

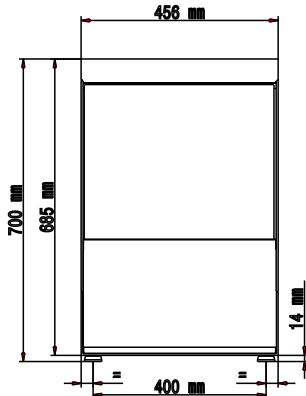


**Side**

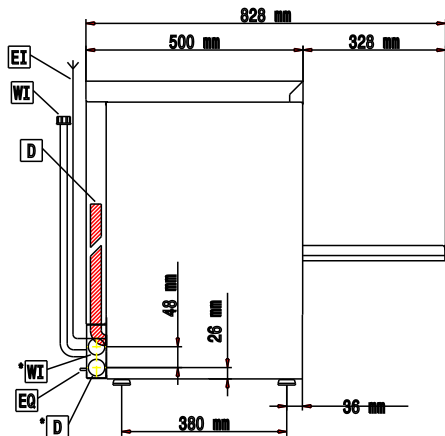

- CW11 = Cold Water inlet
- D = Drain
- EI = Electrical connection
- EO = Electrical Outlet
- V = Air vents
- WI = Water inlet
- XD = Detergent connection
- XR = Rinse aid connection

**Top**

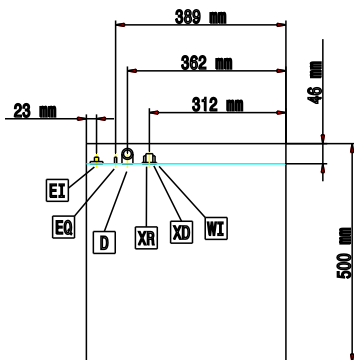

**Electric**

Supply voltage:	
402104 (NGWSDDUK)	230 V/1N ph/50 Hz
Total Watts:	2.7 kW
Boiler heating elements:	
Tank heating elements:	2 kW
Wash pump size:	

**Water**

Pressure, bar min/max:	2-5 bar
Water supply temperature:	10-65 °C
Working cycles time (sec.):	120
Boiler Capacity (lt):	2.5
Incoming water line size:	3/4"
Washing cycle tank capacity (lt):	16
Hot rinse cycle water consumption (lt):	2

**Key Information**

Baskets per hour:	30
N° of working cycles - sec.:	1 (120)
Cell dimensions - width	400 mm
Cell dimensions - depth	400 mm
Cell dimensions - height	290 mm
External dimensions, Width	456 mm
External dimensions, Height	700 mm
External dimensions, Depth	495 mm
Shipping weight:	40 kg
Shipping height:	850 mm
Shipping width:	620 mm
Shipping depth:	590 mm
Noise level:	61 dBA
Basket capacity	30/h
Washing cycle temperature:	60 °C
Hot rinse cycle temperature:	82 °C