



Electrolux

Digital Cabinets Thawing Cabinet, 1 Door, 177gal (670lt)

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Digital Cabinets

Thawing Cabinet, 1 Door, 177gal (670lt)

727655 (TC671DZXU)

Thawing Cabinet, 1-door, stainless steel grids, 177gal (670lt), 28 - 50°F (-2 - +10° C), fully pressed bottom plate and rounded corners; it is supplied with 15 AISI 304 grids 2/1 and the rack support can be removed without tools. The 3 factory-preset and 1 free programs. Built-in refrigeration unit with R134a gas in refrigeration circuit. Meets HACCP requirements. Delivered on wheels

Short Form Specification

Item No. _____

1-door thawing cabinet, fifteen (15) stainless steel grids, 177gal (670lt), 28 - 50°F (-2 - +10°C), supplied with Fifteen (15) full size (18x26) AISI 304 grids 2/1 and the rack support can be removed without tools.

Control panel indicating the real temperature evolution of the cabinet during the preservation process. The electronic control switches automatically from thawing into preservation to avoid bacteria proliferation. It is fully customized in time, temperatures and thaw/ preservation split of phases. The 3 factory-preset and 1 free program to cope with loads from approximately 44lbs (20kg) to 176lbs (80kg).

Built-in refrigeration unit with R134a gas in refrigeration circuit. Meets HACCP requirements. Delivered on wheels.

IMPORTANT: delivered with cord, no plug



APPROVAL: _____

Main Features

- Fully customisable parameters to suit even the most demanding needs.
- Temperature display shows real temperature evolution allowing for frequent and brief checks during the thawing-preservation process.
- The electronic control switches automatically from thawing into preservation to avoid bacteria proliferation.
- Cabinet fitted with up to 3" (75 mm) thickness of cyclopentane insulation for best insulating performance with 100% environmental protection (thermal conductivity: 0,020 W/m*K).
- Even airflow ensured by back air conveyor and ensuring consistent results on products to be thawed in a single load.
- Powerful fan to ensure a quick and uniform thawing process.
- Fully HACCP compliant thanks to the temperature control, visualisation and alarm management.
- 3 factory-preset and 1 free program to cope with loads from approx 44lbs (20kg) to 176lbs (80kg). All programs are customisable in time, temperatures and thaw/preservation split of phases.
- Fits Fifteen (15) Full Size Pans (18x26) on AISI 304 grids GN 2/1 supplied as standard to maximize internal space.

Construction

- CFC, HCFC, HFC-free insulation.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Fully pressed bottom plate and rounded corners for easier cleaning.
- Mainly construction in A304 stainless steel for everlasting operation in all working environment.
- 4 wheels (front ones with brakes) are supplied as standard to ease cleaning operations.

Included Accessories

- 1 of COLLECTING TRAY A304 FOR THAWING CABINET PNC 880337
- 1 of 4 SWIVELLING WHEELS (2 W/ BRAKE) PNC 881002
- 15 of 2/1 GN AISI 304 S/S GRID PNC 881016

Optional Accessories

- 4 SWIVELLING WHEELS (2 W/ BRAKE) PNC 881002
- 2/1 GN AISI 304 S/S GRID PNC 881016



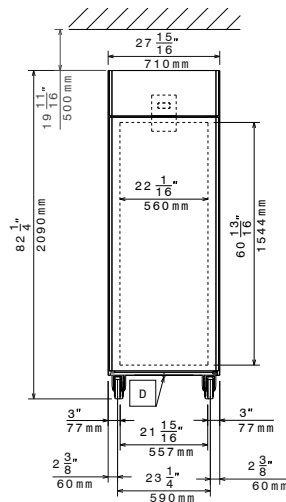

Electrolux

Thawing Cabinet, 1 Door, 177gal (670lt)
Digital Cabinets

Electrolux Professional, Inc.

www.electroluxusa.com/professional

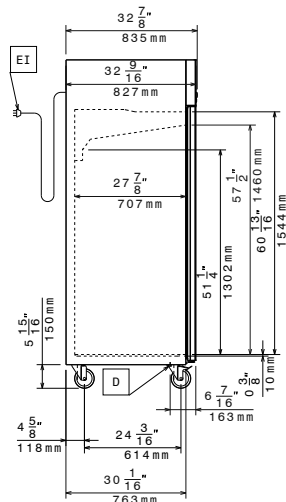
10200 David Taylor Drive, Charlotte, NC 28262 • Telephone Number: 866-449-4200 • Fax Number: 704-547-7401

Front

Top


EI = Electrical connection

RI = Refrigerant Inlet

RO = Refrigerant Outlet

Side


External dimensions

Internal Dimensions (width): 22" (560mm)

Electric

Supply voltage: 208 V/1 ph/60 Hz

Electrical power, max: 1.52 kW

Horsepower: 2 HP

Key Information:

N° of doors: 1

External dimensions, Width: 27 15/16" (710 mm)

External dimensions, Depth: 32 7/8" (835 mm)

External dimensions, Height: 82 1/4" (2090 mm)

Internal Dimensions (depth): 27 15/16" (707mm)

Internal Dimensions (height): 57 1/2" (1460mm)

Net Weight: 258lbs (117kg)

Noise level: 54 dBA

Number and type of grids (included): 15 - 650x530

Type of external material: 304 AISI

Type of internal material: 304 AISI

Approvals: ETL C&US;ETL SANITATION

Back panel: Galvanized Steel

Refrigeration Data

Control type: Digital

Compressor power: 1/3 hp

Refrigerant type: R134a