

## Ice Cuber 28kg/24h with 9kg bin - Air-cooled - UK Plug

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



730570 (RIMC32SAG)

Ice maker, cube, 28 kg/24h, self-contained, 16kg ice collection bin included, air-cooled (ice cube: 18 gr) - uk

### Short Form Specification

**Item No.** \_\_\_\_\_

Plastic flap on the front, top and sides in 304 AISI stainless steel. The ice-making method (spray layering) guarantees crystalline, compact, hygienically pure ice cubes that are resistant to melting. The metal sprayers are easy to take away, permit a simple flowing and prevent limestone formation. R404a refrigerant. Container capacity Kg: 9.

### Main Features

- Fully automatic in operation.
- Operates over a wide range of temperatures.
- Suitable for gravity drain only (no pumps needed).
- Rated output is at an ambient air temperature of 21°C and water supply temperature of 15°C.
- Delivered with UK plug.
- The ice-making method (spray layering) guarantees crystalline, compact, hygienically pure ice cubes that are resistant to melting.
- Model available in air-cooled version.
- Ice cube cone shape with the trunk sides slightly squashed.
- Bin integrated as standard.
- Compliant to CE requirements for safety.
- Compact dimensions of the ice cubers make them highly suitable for any location, particularly those where space is at a premium.


### Construction

- Easy access to the main components for maintenance.
- AISI 304 stainless steel exterior.
- Stainless steel spray arms removable without the use of tools.
- The inox sprayers are easy to take away, permit a simple flowing and prevent limestone formation.
- 5mm feet.
- Internal ice cubes container in ABS.
- Reliability guaranteed by the quality of the construction materials used (plastic flap on the front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.
- Refrigerant type: R404a.


APPROVAL: \_\_\_\_\_

# Ice Cuber 28kg/24h with 9kg bin - Air-cooled - UK Plug

## Front

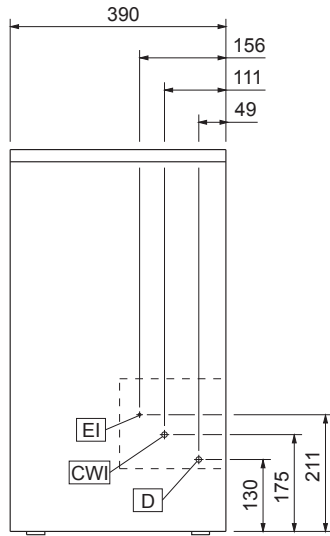


## Side

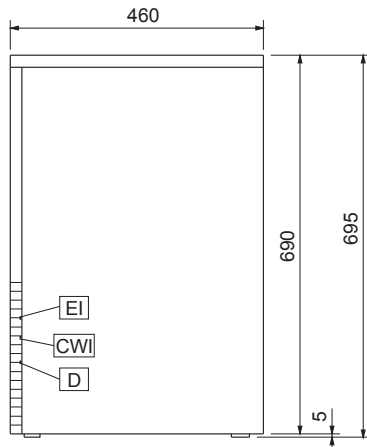

- CWI1** = Cold Water inlet  
**D** = Drain  
**EI** = Electrical connection

## Top

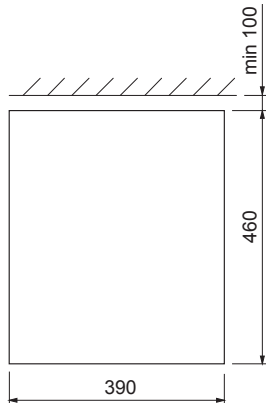

## Electric

Supply voltage:  
730570 (RIMC32SAG) 230 V/1N ph/50 Hz  
Electrical power, max: 0.37 kW

## Capacity

Bin capacity 9 kg

## Key Information

External dimensions, Width 390 mm  
External dimensions, Height 695 mm  
External dimensions, Depth 460 mm  
Noise level: 55,6 dBA  
Output 28 kg/day  
Kind of cube Ice Cube 18 g

## Refrigeration Data

Refrigerant type: R404a