

CPT Line 2 Door Refrigerated Counter, 265lt (-2/+10) - Upstand

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



CPT Line

2 Door Refrigerated Counter, 265lt (-2/+10) - Upstand

728509 (HB2PU)

2-door refrigerated counter
with upstand, -2/+10°C, 304
AISI

Short Form Specification

Item No.

Internal and external doors, front and side panels and worktop in 304 AISI stainless steel. Worktop with splashback. N.2 doors. Built-in refrigeration unit. Ventilated. Refrigerant R404a. High-density expanded polyurethane foam, 50 mm in thickness, with cyclopentane injection. Digital control panel. Completely automatic defrosting and automatic evaporation of defrost water obtained by hot gas. Suitable to operate in ambient temperatures up to +43°C. Temperature range: -2/+10°C. CFC and HCFC free. Feet in 304 AISI stainless steel, adjustable in height. Supplied with n. 2x1/1GN Rilsan grids and n. 6 pairs of runners.

Main Features

- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Refrigerated compartment designed to accept GN 1/1 containers.
- Combination of doors and drawers to suit varying needs, with the possibility to change the configuration on site.
- Digital control panel.
- Forced air circulation for rapid cooling and an even temperature distribution.
- CFC and HCFC free (ecological refrigerant type: R404a, gas in foam: cyclopentane).
- Raised rear upstand permits unit to be connected up against the wall for better hygiene.
- Tropicalized unit (43°C ambient temperature).
- This appliance is intended for use in ambient temperatures up to 40°C.

Construction

- Built-in compressor to suit operating conditions.
- Constructed from AISI 304 Stainless steel throughout to meet the highest hygiene standards.
- Rounded internal corners for ease of cleaning.
- Mounted on Stainless steel adjustable legs to give 150 mm clearance for ease of cleaning.
- Access to all components from the front.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Pre-arranged for drain-pipe.

Included Accessories


- 2 of 1/1 GN grey "rilsan" grid PNC 881435

Optional Accessories

- 4 wheels (2 with brake) PNC 880025
- Reversibility door kit PNC 880046
- Structure to support 3 grids (right+left) PNC 880047
- 3x drawer kit for refrigerated counters PNC 880115
- 2x½ drawer kit for refrigerated counters PNC 880118
- 1/3+2/3-bottle drawer kit for refrigerated counters PNC 880126
- Lock kit for refrigerated counters PNC 880130
- Kit 2 stainless steel GN1/1 grids for refrigerated tables PNC 880139
- Stainless steel structure to support 6 grids PNC 880140
- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- KIT 4 FEET FOR SB&CONCEPT COUNTER PNC 880334
- - NOT TRANSLATED - PNC 880341
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457

APPROVAL: _____

CPT Line 2 Door Refrigerated Counter, 265lt (-2/+10) - Upstand

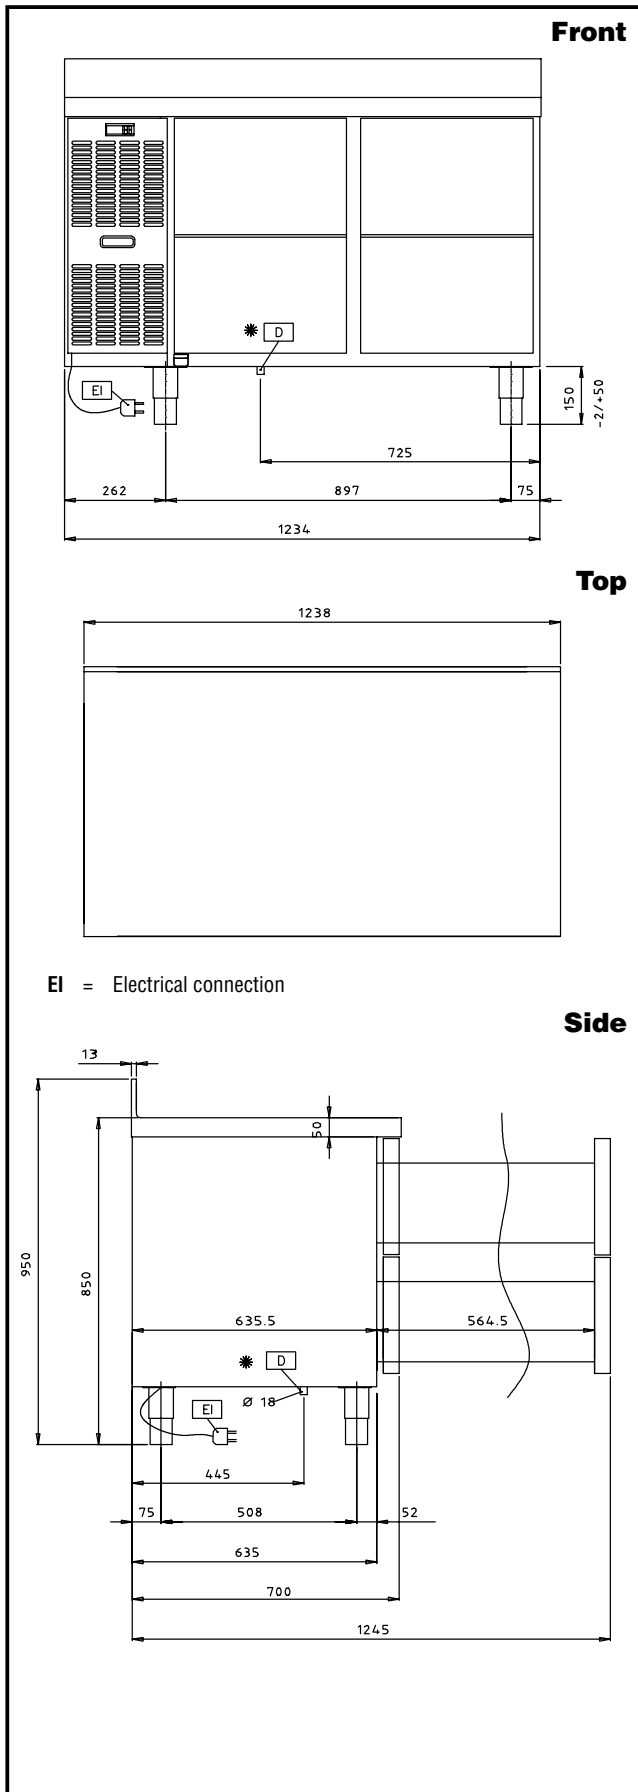

EI = Electrical connection

Electric

Supply voltage:	728509 (HB2PU)	230 V/1N ph/50 Hz
Electrical power, max:		0.267 kW

Key Information

Gross capacity	265 lt
Net Volume:	165 lt
N° of doors:	2
Door hinges:	1 Left+1 Right
Built-in Compressor and Refrigeration Unit	
External dimensions, Height	950 mm
External dimensions, Width	1238 mm
External dimensions, Depth	700 mm
External dimensions, Depth with Doors Open:	1102 mm
Depth with doors open:	1102 mm
Number and type of grids (included):	2 - GN 1/1

Refrigeration Data

Control type:	Digital
Compressor power:	1/3 hp
Refrigerant type:	R404a
Refrigeration power:	448 W
Refrigeration power at evaporation temperature:	-10 °C
Refrigerant weight:	130 g
Min/Max internal humidity	55/
Operating temperature min.:	-2 °C
Operating temperature max.:	10 °C
	mins max by Hot gas

Defrost type	
N° defrost in 24 hrs.	4/20

Product Information (EU Regulation 2015/1094)

Energy Class:	C
Yearly energy consumption:	803kWh/year
Climate class:	Heavy Duty (5)
Energy Efficiency Index (EEL):	36,30

CPT Line 2 Door Refrigerated Counter, 265lt (-2/+10) - Upstand

EU energy labelling from 1st July 2016

The European energy labelling scheme for professional refrigerators and freezers is based on requirements setting Minimum Energy Performance standards for commercial refrigeration cabinets sold within the EU. These requirements are designed to drive energy efficiency and environmentally friendly approach for professionals. The European energy labelling scheme will apply to all manufacturers and importers who sell and market products within the EU and it is mandatory across Europe.

Important: all products which consume energy above the minimum level will not be able to be sold within the EU from 1 July 2016.

