

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

CPT Line
1 Door & 3 Drawer Refrigerated Counter, 265lt (-2/+10) - Remote



CPT Line

1 Door & 3 Drawer Refrigerated Counter, 265lt (-2/+10) - Remote

728254 (HB1P3CR)

1-door and 3-drawer refrigerated counter, -2+10°C, 304 AISI, remote

Short Form Specification

Item No. _____

Internal and external doors, front and side panels and worktop in 304 AISI stainless steel. N.1 door and n.3x1/3 drawers. Remote refrigeration unit. Ventilated. Refrigerant R404a. High-density expanded polyurethane foam, 50 mm in thickness, with cyclopentane injection. Digital control panel. Completely automatic defrosting and automatic evaporation of defrost water obtained by hot gas. Suitable to operate in ambient temperatures up to +43° C. Temperature range: -2+10°C. CFC and HCFC free. Feet in 304 AISI stainless steel, adjustable in height. Supplied with n.1x1/1GN Rilsan grid and n. 3 pairs of runners.

Main Features

- Suitable for use in ambient temperatures of up to 43 °C.
- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Refrigerated compartment designed to accept GN 1/1 containers.
- Combination of doors and drawers to suit varying needs, with the possibility to change the configuration on site.
- Digital control panel.
- Forced air circulation for rapid cooling and an even temperature distribution.
- CFC and HCFC free (ecological refrigerant type: R404a, - gas in foam: cyclopentane).

Construction

- Remote refrigeration unit to suit operating conditions.
- Constructed from AISI 304 Stainless steel throughout to meet the highest hygiene standards.
- Rounded internal corners for ease of cleaning.
- Mounted on Stainless steel adjustable legs to give 150 mm clearance for ease of cleaning.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Pre-arranged for drain-pipe.

Included Accessories


- 1 of 1/1 GN grey "rilsan" grid PNC 881435

Optional Accessories

- 4 wheels (2 with brake) PNC 880025
- Automatic defrost with waste evaporation PNC 880028
- Reversibility door kit PNC 880046
- 3x drawer kit for refrigerated counters PNC 880115
- 2x1/2 drawer kit for refrigerated counters PNC 880118
- 1/3+2/3-bottle drawer kit for refrigerated counters PNC 880126
- Lock kit for refrigerated counters PNC 880130
- Kit 2 stainless steel GN1/1 grids for refrigerated tables PNC 880139
- Stainless steel structure to support 6 grids PNC 880140
- Remote unit 0+10°C for 2 and 3 compartment refrigerated counters PNC 880238
- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- KIT 4 FEET FOR SB&CONCEPT COUNTER PNC 880334
- - NOT TRANSLATED - PNC 880341
- Printer for HACCP basic version (for cabinets and counters with digital control) PNC 881457

APPROVAL: _____

CPT Line 1 Door & 3 Drawer Refrigerated Counter, 265lt (-2/+10) - Remote

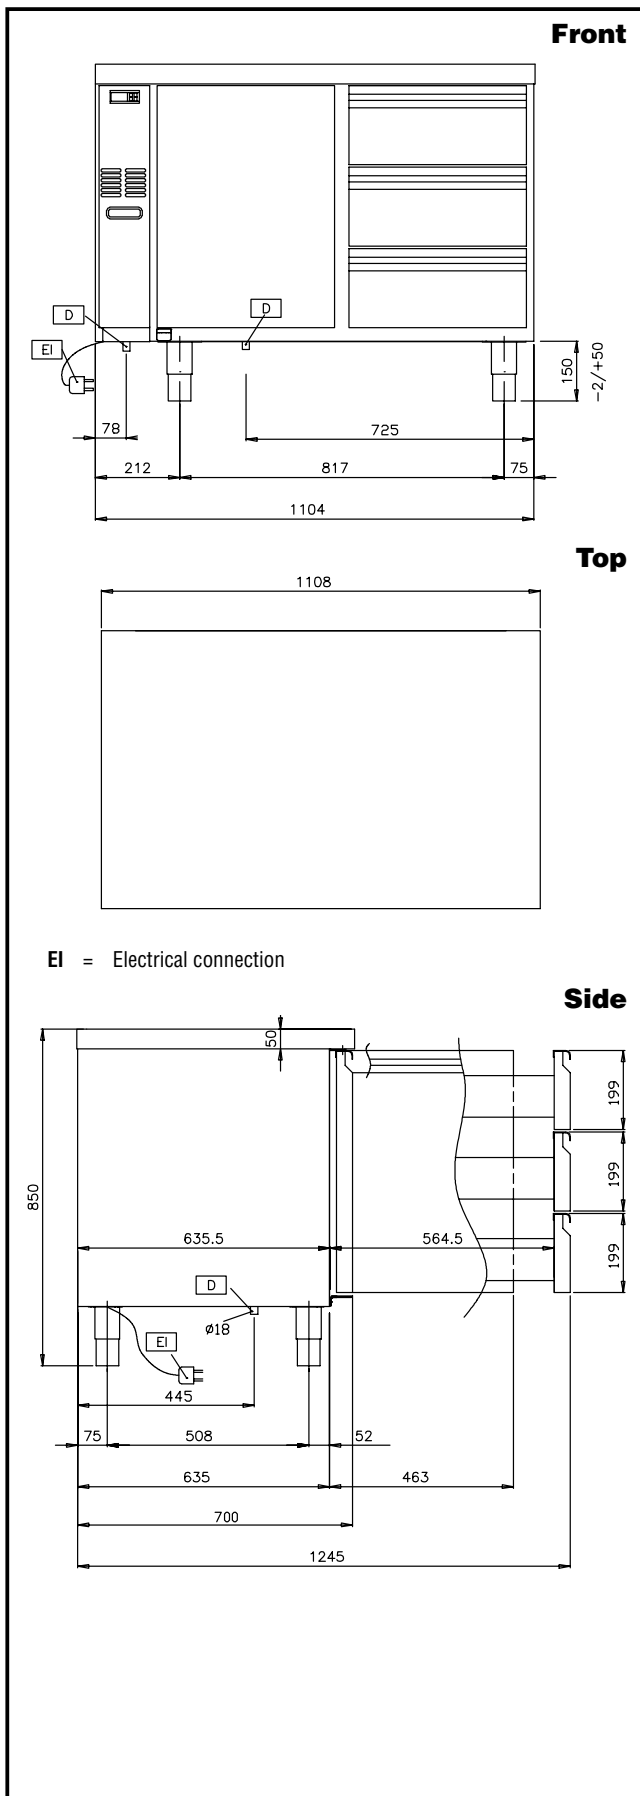

Electric

Supply voltage:
728254 (HB1P3CR) 230 V/1N ph/50 Hz
Electrical power: 0.135 kW

Key Information

Gross capacity 265 lt
N° of doors: 1
Door hinges: Right Side
External dimensions, Height 850 mm
External dimensions, Width 1108 mm
External dimensions, Depth 700 mm
External dimensions, Depth with Doors Open: 1102 mm
Depth with doors open: 1102 mm
Number and type of grids (included): 1 - GN 1/1
N° of drawers 3x1/3
Remote Compressor and Refrigeration Unit

Refrigeration Data

Control type: Digital
Refrigerant type: R404a
Refrigeration power at evaporation temperature: -10 °C
Min/Max internal humidity 50/
Operating temperature min.: -2 °C
Operating temperature max.: 10 °C
Operating mode: Ventilated
Defrost type: mins max by Heating elements
N° defrost in 24 hrs. 4/30

EI = Electrical connection

CPT Line

1 Door & 3 Drawer Refrigerated Counter, 265lt (-2/+10) - Remote

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.