

**CPT Line**  
**2 Door & 2 Drawer Refrigerated Counter, 420lt (-2/+10) - Remote**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



728294 (HB2P2CR)

2-door and 2-drawer refrigerated counter, -2+10°C, 304 AISI, remote

**Short Form Specification**

**Item No.** \_\_\_\_\_

Internal and external doors, front and side panels and worktop in 304 AISI stainless steel. N.2 doors and n.2x1/2 drawers. Remote refrigeration unit. Ventilated. Refrigerant R404a. High-density expanded polyurethane foam, 50 mm in thickness, with cyclopentane injection. Digital control panel. Completely automatic defrosting and automatic evaporation of defrost water obtained by hot gas. Suitable to operate in ambient temperatures up to +43° C. Temperature range: -2+10°C. CFC and HCFC free. Feet in 304 AISI stainless steel, adjustable in height.

Supplied with n.2x1/1GN Rilsan grids and n. 6 pairs of runners.

**Main Features**

- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Refrigerated compartment designed to accept GN 1/1 containers.
- Combination of doors and drawers to suit varying needs, with the possibility to change the configuration on site.
- Digital control panel.
- Forced air circulation for rapid cooling and an even temperature distribution.
- CFC and HCFC free (ecological refrigerant type: R404a, gas in foam: cyclopentane).

**Construction**

- Remote refrigeration unit.
- Constructed from AISI 304 Stainless steel throughout to meet the highest hygiene standards.
- Rounded internal corners for ease of cleaning.
- Mounted on Stainless steel adjustable legs to give 150 mm clearance for ease of cleaning.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Pre-arranged for drain-pipe.

**Included Accessories**


- 2 of 1/1 GN grey "rilsan" grid PNC 881435

**Optional Accessories**

- 4 wheels (2 with brake) PNC 880025
- Automatic defrost with waste evaporation PNC 880028
- Reversibility door kit PNC 880046
- 3x drawer kit for refrigerated counters PNC 880115
- 2x½ drawer kit for refrigerated counters PNC 880118
- 1/3+2/3-bottle drawer kit for refrigerated counters PNC 880126
- Lock kit for refrigerated counters PNC 880130
- Kit 2 stainless steel GN1/1 grids for refrigerated tables PNC 880139
- Stainless steel structure to support 6 grids PNC 880140
- Remote unit 0+10°C for 2 and 3 compartment refrigerated counters PNC 880238
- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- KIT 4 FEET FOR SB&CONCEPT COUNTER PNC 880334
- KIT REVERSIBLE DOOR FOR STANDARD BENEFIT PNC 880341
- KIT HACCP EKIS PNC 922166

APPROVAL: \_\_\_\_\_

## CPT Line 2 Door & 2 Drawer Refrigerated Counter, 420lt (-2/+10) - Remote

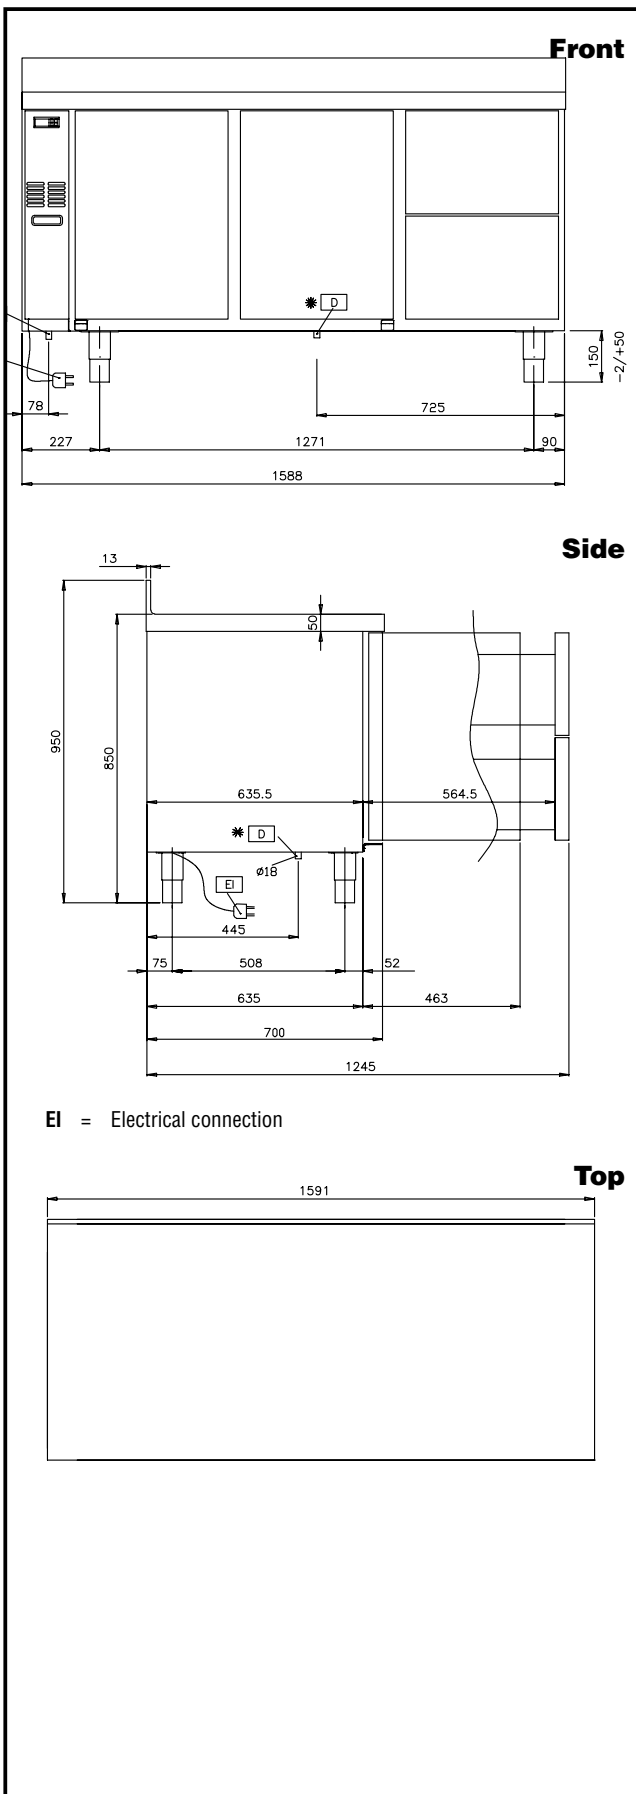

### Electric

Supply voltage:	728294 (HB2P2CR)	230 V/1 ph/50 Hz
Electrical power, max:		0.2 kW

### Key Information

Gross capacity	420 lt
N° of doors:	2
Door hinges:	1 Left+1 Right
External dimensions, Width	1591 mm
External dimensions, Height	850 mm
External dimensions, Depth	700 mm
External dimensions, Depth with Doors Open:	1102 mm
Noise level:	48 dBA
Depth with doors open:	1102 mm
N° of drawers	2½
<b>Remote Compressor and Refrigeration Unit</b>	

### Refrigeration Data

Control type:	Digital
Refrigerant type:	R404a
Refrigeration power at evaporation temperature:	-10 °C
Min/Max internal humidity	50/
Operating temperature min.:	-2 °C
Operating temperature max.:	10 °C
Operating mode	Ventilated
Defrost type	mins max by Heating elements
N° defrost in 24 hrs.	4/30

CPT Line  
2 Door & 2 Drawer Refrigerated Counter, 420lt (-2/+10) - Remote

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.