

160 Line 1 Door Undercounter Freezer (-15/-24) - UK Plug

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



727065 (RUCF16W1CG) 1-door undercounter freezer
160lt, pre-painted
white, -15-24°C - UK plug

727066 (RUCF16X1CG) 1-door undercounter freezer
160lt, stainless steel, -15-20°C
- UK plug

Short Form Specification

Item No. _____

White painted reversible door with lock. Top in white ABS. White painted external sides. Interior in white High Impact Polystyrene with 55mm insulation. Inner cell with rounded corners. Door with removable "balloon" gasket. Built-in refrigeration unit; static operating mode; manual defrost; electronic control; external digital temperature display. Temperature range -20°/-15°C at 43 °C ambient temperature. CFC and HCFC free insulation. R134a gas in refrigeration circuit. Gas in foam: Cyclopentane. IP23 protection. Supplied with n.3 rilsan grids. UK plug.

Main Features

- Very quiet operation: noise level less than 45 dB (A).
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Compact cooling unit easily accesible from the rear of the appliance.
- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket.
- Digital temperature display and simple electromechanical control panel.
- Simple control panel.
- Manual defrost.

Construction

- Interior cell is completely in white High Impact Polystyrene and has no joints to eliminate dirt traps.
- CFC and HCFC-free insulation.
- IP23 protection index.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Reversible door.
- Lockable door.
- Delivered with UK plug.
- Refrigerant type: R134a.


Optional Accessories

- Rear wheel kit for 160lt for freestanding refrigerator and freezer PNC 880143
- 3 rilsan baskets for 160lt undercounter freezer PNC 880189


APPROVAL: _____

160 Line 1 Door Undercounter Freezer (-15/-24) - UK Plug

Front

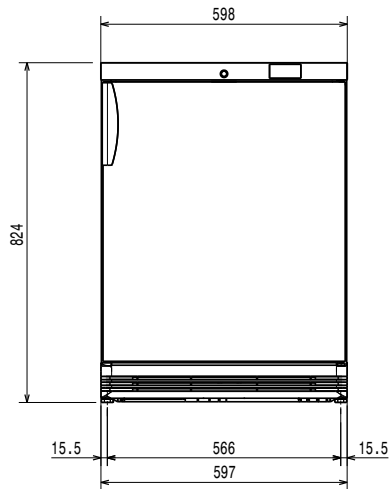


Side

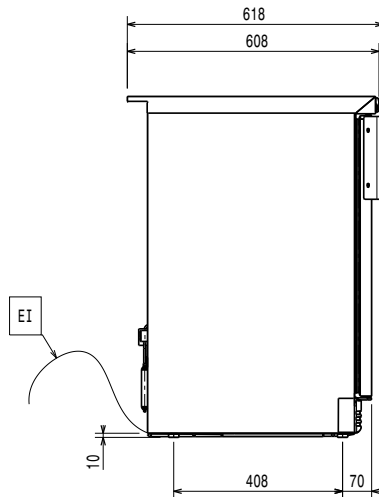

EI = Electrical connection
RI = Refrigerant Inlet
RO = Refrigerant Outlet

Top

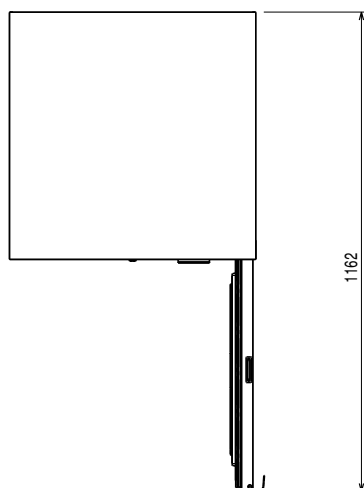

Electric

Supply voltage:

727065 (RUCF16W1CG)	220-240 V/1 ph/50 Hz
727066 (RUCF16X1CG)	220-240 V/1 ph/50 Hz

Electrical power, max:

0.17 kW

Key Information

Gross capacity

727065 (RUCF16W1CG)	110 lt
727066 (RUCF16X1CG)	120 lt

N° of doors:

1

Door hinges:

Right Side

External dimensions, Width	598 mm
External dimensions, Height	825 mm
External dimensions, Depth	618 mm

Noise level:

47 dBA

Height adjustment:

0/10 mm

Type of internal material:

High Impact White Polystyrene

External side panels:

727065 (RUCF16W1CG)	Prepainted white
727066 (RUCF16X1CG)	Prepainted Steel

External top panels:

Stainless Steel

External door material:

727065 (RUCF16W1CG)	Prepainted white
727066 (RUCF16X1CG)	Stainless steel antifingertip

Internal panels material:

High Impact White Polystyrene

Internal side panels material

High Impact White Polystyrene

Refrigeration Data

Control type:	Electronic
Refrigerant type:	R134a
Refrigeration power:	163 W
Refrigeration power at evaporation temperature:	-30 °C
Refrigerant weight:	110 g
Operating temperature min.:	-20 °C
Operating temperature max.:	-15 °C
Operating mode	Static
Cooling unit	Built-In
Defrost type	Manual

160 Line
1 Door Undercounter Freezer (-15/-24) - UK Plug

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.