

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

**Roll-in
1 Full & 1 Glass Door Refrigerator,
750lt (+2/+10) - Pass-through**



726654 (RI075R2FGT)

1-full and 1-glass door roll-in and pass-through refrigerator, 750 lt, +2+10°C, AISI 304

Short Form Specification

Item No. _____

External and internal in AISI 304 stainless steel. Insulation thickness 60mm. One right hinged full door and one glass door with lock. Bottom door gasket adjustable. Built-in refrigeration unit; ventilated operating mode; digital control; evaporator; automatic defrost; external digital temperature display; high/low humidity switch; internal lighting. Operating temperature +2+10°C. For ambient temperatures up to 32° C. CFC and HCFC free. R134a gas in refrigeration circuit. Gas in foam: Cyclopentane.

APPROVAL: _____

Main Features

- Excellent space optimisation thanks to the compact dimensions (footprint 0.56m²).
- One right hinged full door and one glass door with lock.
- The operating temperature can be adjusted from +2 to +10°C to suit both meat and dairy storage requirements.
- Performance guaranteed at ambient temperatures of +32°C.
- Simple control panel: on/off switch, high/low humidity switch and digital temperature display.
- Automatic defrost and automatic evaporation of defrost water.
- Ventilated cooling for optimal temperature distribution.
- Simple cooling unit easily accessible from the rear of the appliance.
- Universal shock-protectors on all sides.
- Suitable for all kinds of 18 shelves GN 1/1 trolleys, designed to fit the 18 shelves GN 2/1 trolley available as optional accessory.
- Adjustable bottom door gasket.
- Lift-up control panel to better access main components.

Construction

- Built-in compressor to suit operating conditions.
- Interior cell and external panel are constructed in 304 AISI stainless steel.
- Refrigerant type: R134a.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Cabinet fitted with up to 60 mm thickness of Cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m*K). CFC and HCFC-free insulation.


Optional Accessories

- Trolley 18x2/1GN for roll-in 750lt PNC 881521


**Roll-in
1 Full & 1 Glass Door Refrigerator, 750lt (+2/+10) - Pass-through**

Roll-in 1 Full & 1 Glass Door Refrigerator, 750lt (+2/+10) - Pass-through

Front

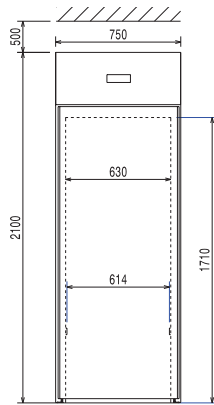


Side

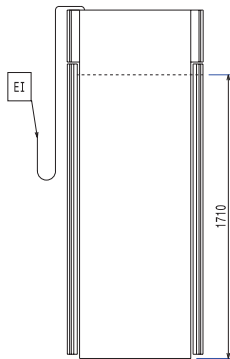

EI = Electrical connection
RI = Refrigerant Inlet
RO = Refrigerant Outlet

Top

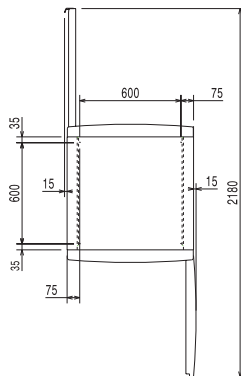

Electric

Supply voltage:
726654 (RI075R2FGT) 230 V/1 ph/50 Hz
Electrical power, max: 0.5 kW

Key Information

Gross capacity 750 lt
N° of doors: 2
Door hinges: Right Side
External dimensions, Width 750 mm
External dimensions, Height 2100 mm
External dimensions, Depth 810 mm
Type of external material: 304 AISI
Type of internal material: 304 AISI
External side panels: 304 AISI
External top panels: 304 AISI
External door material: Glass
Internal panels material: 304 AISI
Internal side panels material 304 AISI

Refrigeration Data

Control type: Digital
Compressor power: 3/8 hp
Refrigerant type: R134a
Refrigeration power: 645 W
Refrigeration power at evaporation temperature: -10 °C
Refrigerant weight: 260 g
Min/Max internal humidity 55/70
Operating temperature min.: 2 °C
Operating temperature max.: 10 °C
Operating mode Ventilated
Cooling unit Built-In
Defrost type Electric