

# Roll-in 1 Door Refrigerator, 750lt (0/+10)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



726650 (RI075R1F)

1-door roll-in refrigerator, 750 lt, 0+10°C, AISI 304

## Short Form Specification

**Item No.** \_\_\_\_\_

External and internal in AISI 304 stainless steel. Insulation thickness 60mm. Right hinged full door with lock. Bottom door gasket adjustable. Built-in refrigeration unit; ventilated operating mode; digital control; evaporator; automatic defrost; external digital temperature display; high/low humidity switch. Operating temperature 0+10°C. For ambient temperatures up to 43°C. CFC and HCFC free. R134a gas in refrigeration circuit. Gas in foam: Cyclopentane.

## Main Features

- Excellent space optimisation thanks to the compact dimensions (footprint 0.56m<sup>2</sup>).
- One full door.
- The operating temperature can be adjusted from 0 to +10 °C to suit both meat and dairy storage requirements.
- Simple control panel: on/off switch, high/low humidity switch and digital temperature display.
- Automatic defrost and automatic evaporation of defrost water.
- Ventilated cooling for optimal temperature distribution.
- Simple cooling unit easily accessible from the rear of the appliance.
- Inner side protectors to protect the internal walls.
- Suitable for all kinds of 18 shelves GN 1/1 trolleys, designed to fit the 18 shelves GN 2/1 trolley available as optional accessory.
- Adjustable bottom door gasket.
- Lift-up control panel to better access main components.

## Construction


- Built-in compressor to suit operating conditions.
- Interior cell and external panel are constructed in 304 AISI stainless steel.
- Bottom panel with rounded internal corners avoids dirt traps.
- Refrigerant type: R134a.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Cabinet fitted with up to 60 mm thickness of Cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m\*K). CFC and HCFC-free insulation.

## Optional Accessories


- Trolley 18x2/1GN for roll-in 750lt  PNC 881521

APPROVAL: \_\_\_\_\_

## Front

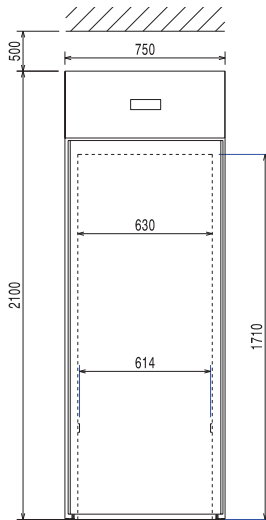


## Side

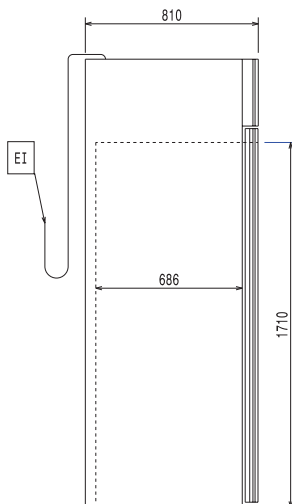

**EI** = Electrical connection  
**RI** = Refrigerant Inlet  
**RO** = Refrigerant Outlet

## Top

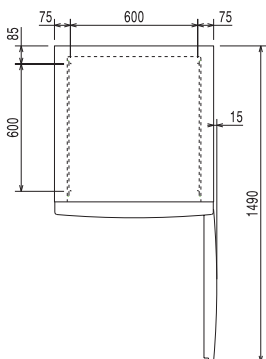

## Electric

**Supply voltage:**  
726650 (RI075R1F) 230 V/1 ph/50 Hz  
**Electrical power, max:** 0.393 kW

## Key Information

**Gross capacity** 750 lt  
**N° of doors:** 1  
**Door hinges:** Right Side  
**External dimensions, Width** 750 mm  
**External dimensions, Height** 2100 mm  
**External dimensions, Depth** 810 mm  
**Type of external material:** 304 AISI  
**Type of internal material:** 304 AISI  
**External side panels:** 304 AISI  
**External top panels:** Galvanized Steel  
**External door material:** 304 AISI  
**Internal panels material:** 304 AISI  
**Internal side panels material** 304 AISI

## Refrigeration Data

**Control type:** Digital  
**Compressor power:** 3/8 hp  
**Refrigerant type:** R134a  
**Refrigeration power:** 523 W  
**Refrigeration power at evaporation temperature:** -10 °C  
**Refrigerant weight:** 260 g  
**Min/Max internal humidity** 70/80  
**Operating temperature min.:** 0 °C  
**Operating temperature max.:** 10 °C  
**Operating mode** Ventilated  
**Defrost type** Automatic