

Roll-in 1 Door Hot Cupboard, 1600lt (+50/+75)

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



726515 (R116H1F)

1-door roll-in hot cupboard
1600lt, +50+75°C, AISI 304

Short Form Specification

Item No. _____

External and internal in AISI 304 stainless steel. Body insulation thickness 72mm. Right hinged full door. Ventilated operating mode; digital control; external digital temperature display. Operating temperature +50+75°C.

Main Features

- Right hinged full door.
- The operating temperature can be adjusted from 50 to 75 °C to suit both meat and dairy storage requirements.
- Simple control panel: on/off switch and digital temperature display.
- Inner side protectors to protect the internal walls.

Construction

- Interior cell is entirely constructed in 304 AISI stainless steel.
- Bottom panel with rounded internal corners avoids dirt traps.
- Exterior finish in AISI 304 stainless steel for easy cleaning.
- 72 mm thick insulation with cyclopentane injection for long-term insulation and energy saving.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.


Optional Accessories

- 17x2/1GN container trolley PNC 361258
- 17x2/1GN compact container trolley PNC 361260
- Trolley for 2/1GN roll-in rack PNC 880017
- Base for roll-in-rack PNC 880018
- Humidifier kit for hot roll-in cabinet, 1600lt PNC 880188
- Kit with 2 hinges for door reversibility PNC 881432
- 2/1GN roll-in rack PNC 881449
- Trolley with 92-plate capacity banquet rack for 20x2/1GN ovens and bcf (85mm pitch) PNC 922055
- KIT HACCP EKIS PNC 922166


APPROVAL: _____

Roll-in 1 Door Hot Cupboard, 1600lt (+50/+75)

Front

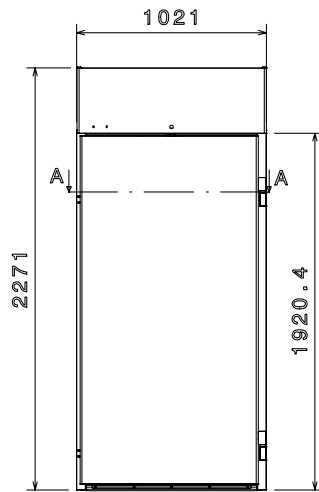


Side

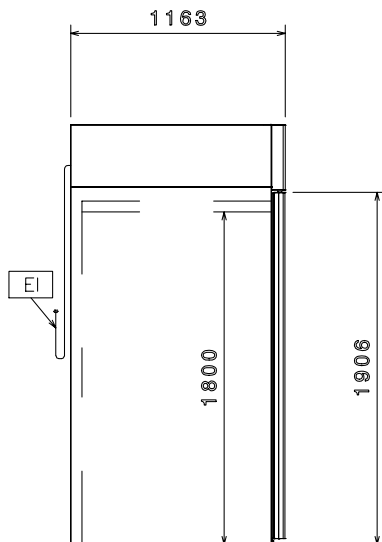

EI = Electrical connection
RI = Refrigerant Inlet
RO = Refrigerant Outlet

Top

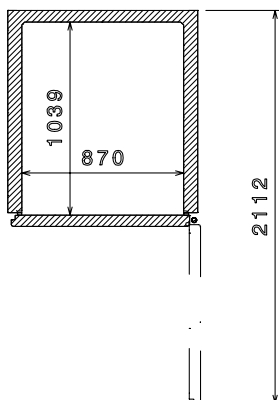

Electric

Supply voltage:
726515 (R116H1F) 400 V/3N ph/50 Hz
Electrical power, max: 1.91 kW

Key Information

Gross capacity 1630 lt
N° of doors: 1
Door hinges: Right Side
External dimensions, Width 1021 mm
External dimensions, Height 2271 mm
External dimensions, Depth 1163 mm
Type of external material: 304 AISI
Type of internal material: 304 AISI
External side panels: 304 AISI
External top panels: 304 AISI
External door material: 304 AISI
Internal panels material: 304 AISI

Refrigeration Data

Control type: Digital
Operating temperature min.: 50 °C
Operating temperature max.: 75 °C
Operating mode: Ventilated

Roll-in
1 Door Hot Cupboard, 1600lt (+50/+75)

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2018.06.14