

# Roll-in 1 Door Refrigerator, 1600lt (+2/+10) - Remote

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



726065 (RI16R1FR)

1-door roll-in refrigerator, 1600 lt, +2/+10°C, remote, AISI 304

## Short Form Specification

**Item No.** \_\_\_\_\_

External and internal in AISI 304 stainless steel. Insulation thickness 75mm. Reversible right hinged full door (need an accessory to have the reversible door), 60mm thick insulation lock included. Bottom door gasket adjustable. Universal shock protectors on all sides. Remote refrigeration unit (not included); ventilated operating mode. Digital control panel; temperature display; humidity control; hidden evaporator; automatic defrost and automatic evaporation of defrost water. Evaporator probe optimizes defrost cycle. Operating temperature +2/+10°C at 43°C ambient temperature. CFC and HCFC free insulation. R134a gas in refrigeration circuit. Gas in foam: Cyclopentane.

## Main Features

- One full door.
- The operating temperature can be adjusted from +2 to +10°C to suit both meat and dairy storage requirements.
- Simple control panel: on/off switch, high/low humidity switch and digital temperature display.
- Automatic defrost and automatic evaporation of defrost water.
- Ventilated cooling for optimal temperature distribution.
- Universal shock-protectors on all sides.
- Plug-in installation: 1 phase, 220/240V supply.

## Construction

- Interior cell and external panel are constructed in 304 AISI stainless steel.
- Bottom panel with rounded internal corners avoids dirt traps.
- 75 mm thick insulation, with cyclopentane injection for long-term insulation and energy saving.
- Remote refrigeration unit.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Finished in top quality materials to ensure durability.
- CFC and HCFC free (ecological refrigerant type: R134a, - gas in foam: cyclopentane).


## Optional Accessories

- Trolley for 2/1GN roll-in rack  PNC 880017
- Base for roll-in-rack  PNC 880018
- Kit with 2 hinges for door reversibility  PNC 881432
- 2/1GN roll-in rack  PNC 881449
- Trolley with 92-plate capacity banquet rack for 20x2/1GN ovens and bcf (85mm pitch)  PNC 922055
- Trolley for 20 2/1 GN roll-in rack  PNC 922134
- Base for 20 2/1 GN roll-in rack  PNC 922142
- 60-mm pitch roll-in rack for 20 2/1 GN  PNC 922204
- 80-mm pitch roll-in rack for 14 2/1 GN  PNC 922206


APPROVAL: \_\_\_\_\_

# Roll-in 1 Door Refrigerator, 1600lt (+2/+10) - Remote

**Front**

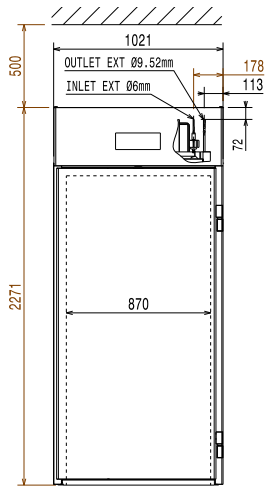


**Side**

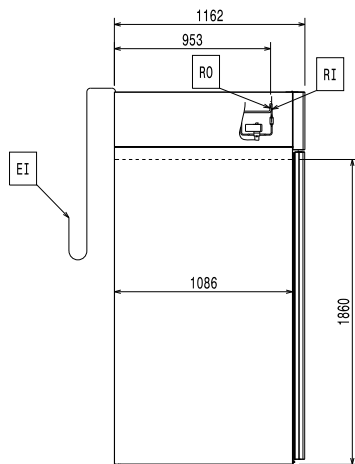

- EI = Electrical connection
- RI = Refrigerant Inlet
- RO = Refrigerant Outlet

**Top**

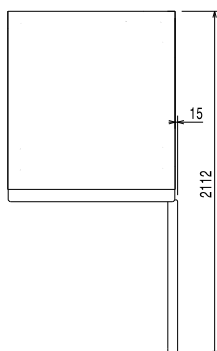

## Electric

Supply voltage:  
726065 (R16R1FR) 230 V/1 ph/50 Hz  
Electrical power, max: 0.2 kW

## Key Information

Gross capacity 1630 lt  
N° of doors: 1  
Door hinges: Right Side  
External dimensions, Width 1021 mm  
External dimensions, Height 2271 mm  
External dimensions, Depth 1163 mm  
Type of external material: 304 AISI  
Type of internal material: 304 AISI  
External side panels: 304 AISI  
External top panels: 304 AISI  
External door material: 304 AISI  
Internal panels material: 304 AISI  
Internal side panels material 304 AISI

## Refrigeration Data

Control type: Digital  
Refrigerant type: R134a  
Min/Max internal humidity 75/90  
Operating temperature min.: 2 °C  
Operating temperature max.: 10 °C  
Operating mode Ventilated  
Cooling unit Remote  
Defrost type Electric

Roll-in  
1 Door Refrigerator, 1600lt (+2/+10) - Remote

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2018.06.14