

Electrolux Professional

Electrolux

# Range Overview Commercial Laundry



**Electrolux**

# Excellent solutions that meets your needs

Commercial laundries need to be competitive. That is why our solutions are developed to deliver significant time and money savings in the total process through 'Excellence inside' – intelligent features and unique extras.

## Electrolux Excellence



Excellence is central to everything we do. By anticipating our customers' needs, we strive for Excellence with our people, innovations, solutions and services. Thus making our customers' work and life easier and more profitable.

## Washer Extractor Control ensures the best utility cost optimisation and customising



### Clarus Control®

- ▶ Fully programmable with up to 194 programs for unparalleled versatility
- ▶ Create new programs directly on Clarus Control®/Clarus TS® panel or on your PC with Laundry Program Manager, then transfer them to machines via memory card
- ▶ Intelligent parameters save time, energy and water while delivering excellent wash and rinse results in every application
- ▶ 8 liquid detergent signals, plus efficient detergent dosing via connection to Efficient Dosing System
- ▶ Process monitoring via Certus Management™ Information System



### Compass Pro®

- ▶ Flexible and customisable
- ▶ Up to 55 programs available of which 15 programmable
- ▶ Large, clear display in 18 languages, plus Real-time clock
- ▶ Create new programs on your PC with the Laundry Program Manager, then transfer them to machines via USB port
- ▶ Automatic Saving System: save up to 50% on water for half load
- ▶ 5 liquid detergent signals
- ▶ Process monitoring via Certus Management™ Information System

## Tumble Dryer Control

ensures the best flexibility and usability



### Compass Pro®

- ▶ Flexible and customisable
- ▶ Up to 55 programs available of which 15 programmable
- ▶ Large, clear display in 18 languages, plus Real-time clock
- ▶ Create new programs on your PC with the Laundry Program Manager, then transfer them to machines via USB port
- ▶ Process monitoring via Certus Management™ Information System



### Selecta Control®

- ▶ Accurate temperature/humidity control for quick, efficient drying
- ▶ Automatic inversion of drum rotation
- ▶ Automatic cooling cycle reduces creasing and improves finish
- ▶ 9 programs, including for entire electronic cycle, exact temperature control and constantly high drying performance
- ▶ Select drying time, cooling and reverse action
- ▶ Continuous self-testing, displays and logs error codes for easy troubleshooting
- ▶ Process monitoring via Certus Management™ Information System

## Ironer Control

ensures the best results thanks to process optimisation



### Electronic control

- ▶ Large, intuitive display
- ▶ Indicator light informs operator if retained humidity after ironing is too high
- ▶ Ensures optimum dryness and hygiene, plus compliance with risk analysis and bio-contamination quality control
- ▶ Process monitoring via Certus Management™ Information System



### Electro-mechanical control

- ▶ Easy to read and set
- ▶ Ironing temperature and speed can be adjusted at any time
- ▶ Autostop function to maximise ironing belt lifetime (standard)

# Washer Extractors

## Choose the solution that suits you best

- standard    ○ option
- x available    - not available



Washer Extractors H High Spin Range	W5130H	W5180H	W5240H	W5300H	W4400H	W4600H	W4850H	W41100H
Drum volume, l	130	180	240	300	400	600	850	1100
Dry weight capacity, kg/lb	14/30	20/45	27/60	33/75	45/100	65/145	90/200	120/250
Extraction, rpm	980	930	890	820	825	800	720	663
G-factor	450	450	450	400	350	350	350	300
Water consumption cold/hot, l*	90/22	128/31	167/42	211/51	programmable	programmable	programmable	programmable
Width, mm	910	970	1020	1020	1325	1390	1640	1640
Depth, mm	821	947	990	1134	1450	1585	1635	1850
Height, mm	1340	1426	1462	1462	1975	1975	2190	2190
Width, in	35 13/16*	38 3/16*	40 3/16*	40 3/16*	52 3/16*	54 12/16*	64 9/16*	64 9/16*
Depth, in	32 5/16*	37 5/16*	39*	44 5/8*	57 1/16*	62 1/2*	64 3/8*	72 13/16*
Height, in	52 3/4*	56 1/8*	57 9/16*	57 9/16*	77 3/4*	77 3/4*	86 1/4*	86 1/4*
Electric/ Steam/ Non-heated	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x	x/x/-	-/x/x	-/x/x
Compass Pro*	●	●	●	●	-	-	-	-
Clarus Control*	○	○	○	○	●	●	●	●
Wet-cleaning Excellence	○	○	○	○	○	○	○	○

\* Consumption data: Normal 60 °C (140 °F) program  
(without pre-wash, 3 rinses at rated capacity electrical heating)



Side load Barrier Washers Side load Washers Extractors	WB5130H	WB5180H	WSB5200H	WSB5270H	WSB5350H	WSB4500H	WSB4650H	WPB4700H	WPB4900H	WPB41100H
Drum volume, l	130	180	200	270	350	500	650	690	890	1080
Dry weight capacity, kg/lb	13/30	18/40	20/44	27/60	35/77	50/110	65/143	70/154	90/198	110/242
Extraction, rpm	910	860	910	910	910	910	910	720	720	720
G-factor	300	300	350	350	350	350	350	300	300	300
Width, mm	910	970	895	1050	1270	1565	2000	1496	1726	1956
Depth, mm	875	975	1040	1050	1060	980	980	1363	1363	1363
Height, mm	1325	1410	1620	1620	1620	1610	1610	2040	2040	2040
Width, in	35 13/16*	38 3/16*	35 1/4*	41 5/16*	50*	61 5/8*	78 3/4*	58 7/8*	67 15/16*	77*
Depth, in	34 7/16*	38 3/8*	40 15/16*	41 5/16*	41 3/4*	38 9/16*	38 9/16*	53 11/16*	53 11/16*	53 11/16*
Height, in	52 3/16*	55 1/2*	63 3/4*	63 3/4*	63 3/4*	63 3/8*	63 3/8*	80 5/16*	80 5/16*	80 5/16*
Electric/Steam/Gas/Thermal Oil	x/x/-/-	x/x/-/-	x/x/x/-	x/x/x/-	x/x/x/-	x/x/x/x	x/x/x/x	x/x/-/x	x/x/-/x	x/x/-/x
Compass Pro*	●	●	●	●	●	-	-	-	-	-
Clarus Control*	○	○	-	-	-	●	●	-	-	-
Clarus TS*	-	-	-	-	-	-	-	●	●	●
Wet-cleaning Excellence	○	○	○	○	○	○	-	-	-	-

- standard    ○ option
- x available    - not available



**Washer Extractors**  
X Extra Spin Range

**W5280X    W5350X    W5600X**

Drum volume, l	280	350	600
Dry weight capacity, kg / lb	28 / 62	35 / 77	60 / 145
Extraction, rpm	805	650	650
G-factor	300	220	220
Water consumption cold/hot, l*	312 / 0	320 / 67	598 / 105
Width, mm	933	1115	1173
Depth, mm	985	1121	1193
Height, mm	1456	1570	1673
Width, in	36 3/4"	43 7/8"	46 3/16"
Depth, in	38 3/4"	44 1/8"	46 15/16"
Height, in	57 5/16"	61 13/16"	65 7/8"
Electric / Steam / Non-heated	- / x / x	x / x / x	x / x / x
Compass Pro*	●	●	●
Clarus Control*	○	○	○

\* Consumption data: Normal 60 °C (140 °F) program  
(without pre-wash, 3 rinses at rated capacity electrical heating)



**Wash&Dry**

**WD5130    WD5240**

Drum volume, l	130	240
Dry weight capacity, kg / lb	8 / 18	15 / 33
Extraction, rpm	980	980
G-factor	350	350
Water consumption cold/hot, l*	48 / 12	82 / 22
Electric / Electric	●	●
Width, mm	910	1020
Depth, mm	1110	1350
Height, mm	1330	1450
Width, in	35 13/16"	40 3/16"
Depth, in	43 11/16"	53 1/8"
Height, in	52 3/8"	57 1/16"
Electric / Gas	○	○
Non-heated / Gas or Electric	○	○
Compass Pro*	●	●
Wet-cleaning Excellence	-	○

\* Consumption data: Normal 60 °C (140 °F) program

## Tumble Dryers

Find the solution that meets your needs



**Tumble Dryers**

**T5250    T5290    T5350    T5550    T5675    T4900    T41200**

Drum volume, l	250	290	349	550	675	900	1200
Dry weight capacity, kg / lb, Filling factor 1:18	13.9 / 30.7	16.1 / 35.5	19.4 / 42.8	30.5 / 67.2	37.5 / 82.7	50 / 110	66.7 / 147
Width, mm	790	713	790	961	961	1290	1290
Depth, mm	958	1210	1177	1365	1560	1295	1485
Height, mm	1770	1688	1770	1869	1857	2465	2465
Width, in	31 1/8"	28 1/16"	31 1/8"	37 13/16"	37 13/16"	50 13/16"	50 13/16"
Depth, in	37 11/16"	47 5/8"	46 5/16"	53 3/4"	61 7/16"	51"	58 7/16"
Height, in	69 11/16"	66 7/16"	69 11/16"	73 9/16"	73 1/8"	97"	97"
Sliding door	-	-	-	-	-	○	○
Electric / Gas / Steam	x / x / x	x / x / x	x / x / x	x / x / x	x / x / x	x / x / x	x / x / x
Selecta Control*	-	-	-	-	-	●	●
Compass Pro*	●	●	●	●	●	-	-
Residual Moisture Control	○	○	○	○	○	●	●
Reversing Drum Action	○	○	○	○	○	●	●
Wet-cleaning Excellence	○	○	○	○	○	○	○
Sliding Door	-	-	-	-	-	○	○

# Ironers


Discover which solution is best for you

- standard    ○ option
- x available    - not available



Ironers	IC43316	IC43320	IC44819	IC44821	IC44825	IC44828	IC44832	IC44819 FFS	IC44825 FFS	IC44832 FFS
Roll diameter mm/in	325 / 13	325 / 13	479 / 19	479 / 19	479 / 19	479 / 19	479 / 19	479 / 19	479 / 19	479 / 19
Ironing width mm/in	1650 / 65	2065 / 81	1910 / 75	2120 / 83	2540 / 100	2750 / 108	3170 / 125	1910 / 75	2540 / 100	3170 / 125
Width, mm	2030	2445	2575	2785	3205	3205	3835	3555	4185	4815
Depth, mm	690	690	1070	1070	1070	1070	1070	1820	1820	1820
Height, mm	1145	1145	1270	1270	1270	1270	1270	1590	1590	1590
Width, in	79 15/16"	96 1/4"	101 3/8"	109 5/8"	126 3/16"	126 3/16"	151"	139 15/16"	164 3/4"	189 9/16"
Depth, in	27 3/16"	27 3/16"	42 1/8"	42 1/8"	42 1/8"	42 1/8"	42 1/8"	71 5/8"	71 5/8"	71 5/8"
Height, in	45 1/16"	45 1/16"	50"	50"	50"	50"	50"	62 5/8"	62 5/8"	62 5/8"
Width, mm (with Feeding and Length Folding)	-	-	2575	2785	3205	3205	3835	-	-	-
Depth, mm (with Feeding and Length Folding)	-	-	1280	1280	1280	1280	1280	-	-	-
Height, mm (with Feeding and Length Folding)	-	-	1460	1460	1460	1460	1460	-	-	-
Width, in (with Feeding and Length Folding)	-	-	101 3/8"	109 5/8"	126 3/16"	126 3/16"	151"	-	-	-
Depth, in (with Feeding and Length Folding)	-	-	50 3/8"	50 3/8"	50 3/8"	50 3/8"	50 3/8"	-	-	-
Height, in (with Feeding and Length Folding)	-	-	57 1/2"	57 1/2"	57 1/2"	57 1/2"	57 1/2"	-	-	-
Electric / Steam / Gas	x/x/-	x/x/-	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x	x/x/x
Evaporation capacity l/h	19.5	24.5	38/57/35	40/63/37	48/75/46	51/81/51	59/93/59	38/57/35	48/75/46	59/93/59
Speed m/minute	0.5 to 5.5	0.5 to 5.5	1.5 to 9	1.5 to 9	1.5 to 9	1.5 to 9	1.5 to 9	1.5 to 11	1.5 to 11	1.5 to 11
Ironer Moisture	○	○	●	●	●	●	●	●	●	●
Dubixium™*	-	-	○	○	○	○	○	●	●	●
Automatic feeding	-	-	○	○	○	○	○	●	●	●
Automatic folding	-	-	○	○	○	○	○	●	●	●

\* For electric and gas heated versions



Ironers	C-Flex 900	C-Flex 1200
Roll diameter mm/in	900 / 35	1200 / 47
Ironing width mm/in	2700 to 3500 / 106 to 138	3000 to 4200 / 118 to 165
Width x Depth x Height (1 roll), mm*	4500 x 1685 x 1560	4500 x 1985 x 1760
Width x Depth x Height (2 rolls), mm*	4500 x 2955 x 1560	4500 x 3555 x 1760
Width x Depth x Height (3 rolls), mm*	4500 x 4225 x 1560	4500 x 5125 x 1760
Width x Depth x Height (1 roll), in	177 3/16" x 66 5/16" x 61 7/16"	177 3/16" x 78 1/8" x 69 5/16"
Width x Depth x Height (2 rolls), in	177 3/16" x 116 5/16" x 61 7/16"	177 3/16" x 139 15/16" x 69 5/16"
Width x Depth x Height (3 rolls), in	177 3/16" x 166 5/16" x 61 7/16"	177 3/16" x 201 3/4" x 69 5/16"
Steam/Gas/Thermal Oil	x/x/x	x/x/x
Evaporation capacity l/h	205 to 795	210 to 1260
Number of rolls	1 to 3	1 to 3
Speed m/minute	4 to 51	6 to 51

\* For 3.3 m working width models

# Other Equipment

● standard    ○ option  
 x available    - not available



Drying Cabinets	FC48	TS5121
Garments/hours*	70	
Loading Capacity kg/lb		6-8 / 12-18
Width, mm	870	1200
Depth, mm	1300	580
Height, mm	1975	1820
Width, in	34 1/4"	47 1/4"
Depth, in	51 3/16"	22 13/16"
Height, in	77 3/4"	71 5/8"
Electric / Gas / Steam	x / x / x	● / - / -
Microprocessor	semi-programmable	pre-fixed programmes

\* Estimated production power

A wide range of options and accessories (trolleys, bases, condensing units, etc) is also available, ask our local offices!



FSU1 spotting table



FSF2 shirt finisher



FSF3 shirt finisher



FFT-S form finisher



FPA6-WC collar and cuff press



FFT-D form finisher



FTT1 trouser topper



FPA3-D leg shape press



FIT2WC ironing table

## Unique Service Excellence

Always near.  
Always there for you

A reliable, global presence: Electrolux Professional offers the most extensive service network of skilled, authorized partners for daily tasks: installation, spare parts and maintenance. All of them provide an efficient customer service and fast technical assistance. A global service network for prompt, expert advice worldwide.

- ▶ 2,000 authorised service centres
- ▶ Over 10,000 expert technicians
- ▶ 98,000 available spare parts in stock
- ▶ Spare parts are guaranteed for at least 10 years from the end of production
- ▶ 24-48 hr spare parts delivery worldwide



# Electrolux


## Electrolux Professional

### Commercial Laundry Solutions

Hygiene Laundry Solutions

In-House Laundry Solutions

Consumer-Operated Laundry Solutions

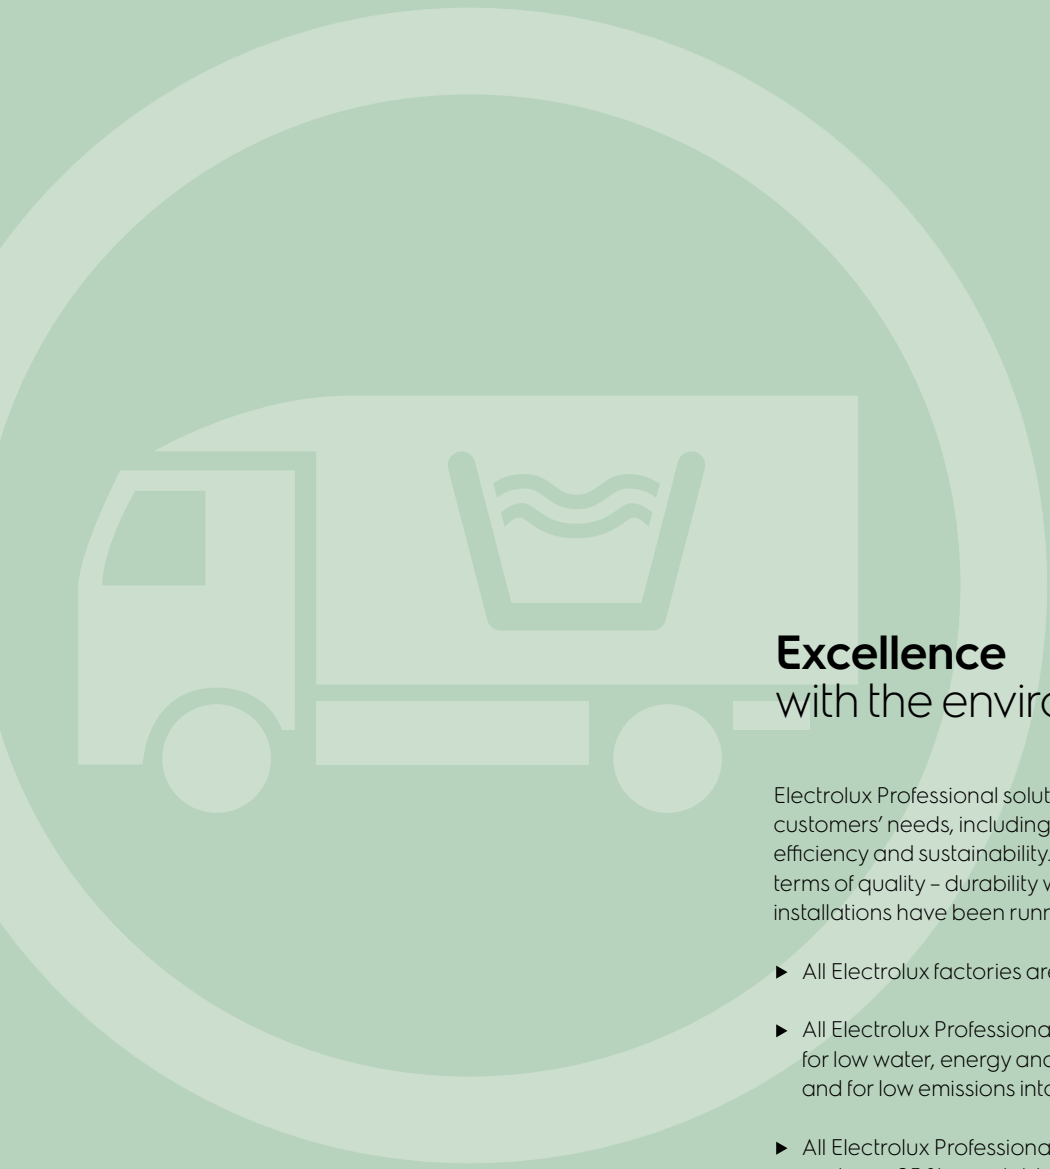

## Excellence with the environment in mind

Electrolux Professional solutions perfectly match the customers' needs, including the areas of reliability, cost efficiency and sustainability. The products are the best in terms of quality - durability with low running costs. Some installations have been running for more than 40 years!

- ▶ All Electrolux factories are ISO 14001-certified
- ▶ All Electrolux Professional products are designed for low water, energy and detergent consumption, and for low emissions into the environment
- ▶ All Electrolux Professional products are ROHS-compliant and over 95 % recyclable
- ▶ All units are quality tested, piece by piece, and all of the functions are singularly checked by expert technicians
- ▶ In the last five years, more than 70% of Electrolux Professional solutions have been updated with features that are always designed with the needs of customers and environmental considerations in mind



Discover the Electrolux Excellence  
and share more of our thinking at  
[www.electrolux.com/professional](http://www.electrolux.com/professional)