

Ice Cuber 200kg/24h with 200kg S/S bin - Air-cooled - Vertical System

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



730175 (MC200AB20)

Modular ice maker, cube, 200 kg/24h, vertical system, 200 kg stainless steel collection bin, air-cooled (ice cube: 7 gr)

Short Form Specification

Item No. _____

Constructed in 304 AISI stainless steel. The ice-making method guarantees crystalline, compact, hygienically pure ice cubes that are resistant to melting. Vertical evaporator. Refrigerant: R452A. Container capacity: 200 Kg.

Main Features

- Compliant to CE requirements for safety.
- Fully automatic in operation.
- Suitable for gravity drain only (no pumps needed).
- Rated output is at an ambient air temperature of 21°C and water supply temperature of 15°C.
- Stainless steel spray arms removable without the use of tools and prevent limestone formation.
- Model available in air-cooled version.
- Bin included.
- Ice cube pyramid-trunk shape.

Construction


- Plug as standard (schuko type).
- AISI 304 stainless steel exterior.
- Easy access to the main components for maintenance.
- Stainless steel spray arms removable without the use of tools.
- Reliability guaranteed by the quality of the construction materials used (plastic flap on the front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.
- The inox sprayers are easy to take away, permit a simple flowing and prevent limestone formation.
- Adjustable feet 110-150 mm.
- The ice-making method guarantees ice cubes that quickly cool the drinks down.
- Thanks to a vertical evaporator, the appliance guarantees considerable ice production in a short time: the cubes detach individually and fall into the bin, perfectly separated from each other and of equal size (7 g).
- Environmentally friendly: R452a as refrigerant gas.

Included Accessories


- 1 of 200 Kg stainless steel collection bin for ice makers PNC 730170

APPROVAL: _____

Front

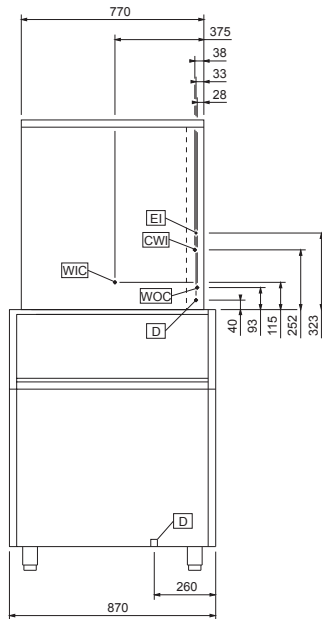


Side

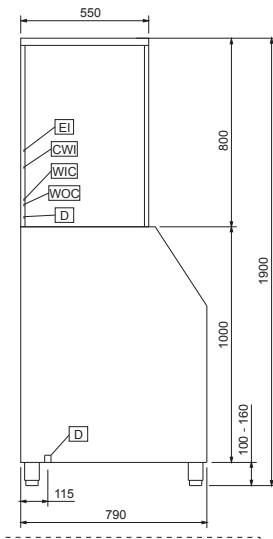

- CWI1** = Cold Water inlet 1
- D** = Drain
- EI** = Electrical inlet (power)

Top



Electric

Supply voltage:

730175 (MC200AB20) 220-240 V/1N ph/50 Hz

Electrical power max.:

1.6 kW

Capacity:

Bin capacity:

200 kg

Key Information:

External dimensions, Width:

870 mm

External dimensions, Height:

1900 mm

External dimensions, Depth:

790 mm

Net weight:

164 kg

Output:

200 kg/day

Kind of cube:

Ice Cube 7 g

Refrigeration Data

Refrigerant type:

R452A