

Ice Cuber 35kg/24h with 16kg bin Ice maker, air-cooled with drain pump

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



730273 (IC35B16G)

Ice maker, cube, 35 kg/24h,
16kg ice collection, bin
included, drain pump, air-
cooled

Short Form Specification

Item No. _____

Plastic flap on the front, top and sides in 304 AISI stainless steel.
The ice-making method (spray layering) guarantees compact, hygienically pure ice cubes that are resistant to melting. The metal sprayers are easy to take away, permit a simple flowing and prevent limestone formation. R404a refrigerant. Container capacity Kg: 16.

Main Features


- Height adjustable stainless steel feet.
- Compliant to CE requirements for safety.
- Fully automatic in operation.
- Operates over a wide range of temperatures.
- Suitable for gravity drain only (no pumps needed).
- Rated output is at an ambient air temperature of 21°C and water supply temperature of 15°C.
- Compact dimensions of the ice cubers make them highly suitable for any location, particularly those where space is at a premium.
- The ice-making method (spray layering) guarantees crystalline, compact, hygienically pure ice cubes that are resistant to melting.
- Model available in air-cooled version.
- Ice cube cone shape with the trunk sides slightly squashed.
- Bin integrated as standard.
- Air filters are easily removable and cleanable without tools.
- Reduced energy consumption by fully insulated storage bin.

Construction


- Rounded internal corners for ease of cleaning.
- Easy access to the main components for maintenance.
- AISI 304 stainless steel exterior.
- Stainless steel spray arms removable without the use of tools.
- Reliability guaranteed by the quality of the construction materials used (plastic flap on the front, top and sides in 304 AISI stainless steel) and the sophisticated product and process technology involved.
- The inox sprayers are easy to take away, permit a simple flowing and prevent limestone formation.
- Internal ice cubes container in ABS.
- ON-OFF rocker switch.

APPROVAL: _____

Front

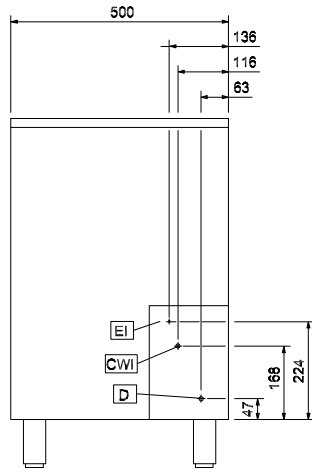

Side

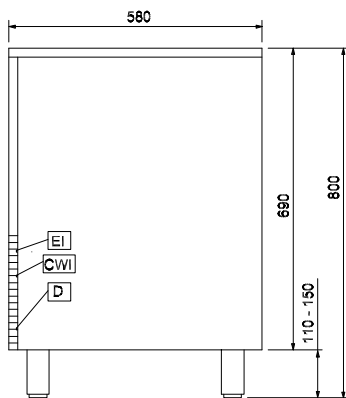


CW11 = Cold Water inlet 1 **WOC** = Cooling water outlet

D = Drain

EI = Electrical inlet (power)

WIC = Cooling water inlet

Top

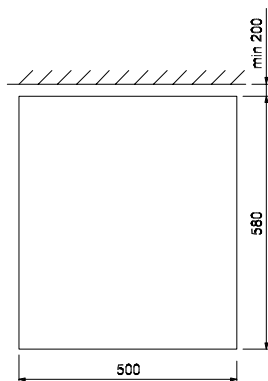

Electric

Supply voltage:

730273 (IC35B16G) 220-240 V/1 ph/50 Hz

Electrical power max.:

0.34 kW

Capacity:

Bin capacity:

16 kg

Key Information:

External dimensions, Width: 500 mm

External dimensions, Height: 690 mm

External dimensions, Depth: 580 mm

Output: 40 kg/day

Kind of cube: Ice Cube 18 g

Refrigeration Data

Refrigerant type:

;R290

ALPENINOX

**Ice Cuber
35kg/24h with 16kg bin Ice
maker, air-cooled with drain pump**



**Ice Cuber
35kg/24h with 16kg bin Ice maker, air-cooled with drain pump**
The company reserves the right to make modifications to the products
without prior notice. All information correct at time of printing.

2018.09.21