

## 400 Line 1 Door Fish Refrigerator (-6/+6) - Stainless steel (R290)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



729449 (A4NVF4F)

1-door fish refrigerator  
400lt, -6+6°C, (R290), A430,  
stainless steel, ventilated

### Short Form Specification

**Item No.** \_\_\_\_\_

Exterior in stainless steel. Interior in white High Impact Polystyrene with rounded corners and 45mm thick insulation. Right hinged full door with lock, reversible on-site. Built-in refrigeration unit; ventilated operating mode; automatic defrost by heating elements and evaporation of defrost water only through drain; digital control and temperature display. For ambient temperatures up to 38°C. HCFC, CFC and HFC free insulation and R290 refrigerant gas.

Supplied with n. 5 containers (with stainless steel false bottom) mm600x400.

### Main Features

- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Suitable for use in ambient temperatures of up to 38 ° C.
- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket.
- Very quiet operation.
- Whole interior cell with rounded corners is white thermoformed polystyrene, which is impact resistant.
- No joints whatsoever to eliminate dirt traps.
- Simple refrigeration system easily accessible from the rear of the units.
- Fan assisted cooling for even temperature distribution.
- CFC and HCFC free (highly ecological refrigerant type: R290).
- CFC and HCFC free, highly ecological refrigerant type: R290 (ecological gas in foam: cyclopentane). Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3), to reduce green house and ozone depletion effects.

### Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models in range are finished in top quality materials to aid durability.


### Included Accessories

- 5 of PVC container with false bottom for 400L PNC 881072


### Optional Accessories

- Pair of white grids for 400L refrigerators PNC 880292
- Kit of wheels for 400L refrigerators PNC 880348
- PVC container with false bottom for 400L PNC 881072

APPROVAL: \_\_\_\_\_

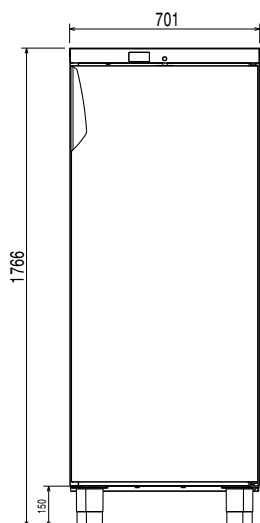


**Front**

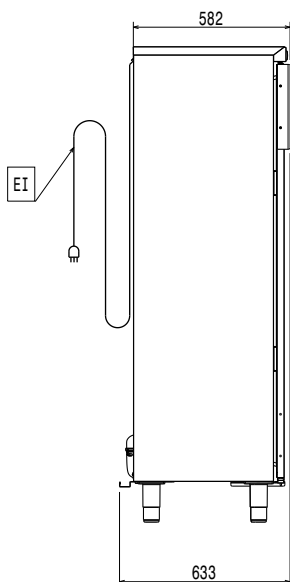

**Side**

EI = Electrical inlet (power)  
RI = Refrigerant Inlet  
RO = Refrigerant Outlet

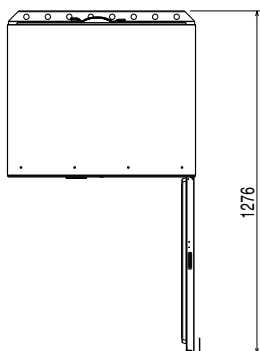

**Top**

### Electric

Supply voltage:	729449 (A4NVF4F)	220-240/1 ph/50 Hz
Electrical power max.:		0.22 kW
Defrost Power:		0.54 kW
Current consumption:		1.5 Amps
Plug type:		CE-SCHUKO
Energy consumption (min,default):		1.25 - 4.29 kW/h

### Key Information:

Gross capacity:	400 lt
Net Volume:	268 lt
Door hinges:	
External dimensions, Width:	701 mm
External dimensions, Height:	1766 mm
External dimensions, Depth:	633 mm
Number and type of doors:	1 Full
Internal Dimensions (depth):	435 mm
Internal Dimensions (height):	1450 mm
Internal Dimensions (width):	610 mm
Net weight:	84 kg
Shipping volume:	0.98 m <sup>3</sup>
Height adjustment:	0/0 mm
Number and type of grids (included):	

### Refrigeration Data

Control type:	Digital
Compressor power:	1/4 hp
Refrigerant type:	R290
GWP Index:	3
Refrigeration power:	320 W
Refrigeration power at evaporation temperature:	-10 °C
Refrigerant weight:	92 g
Min/Max internal humidity:	70%/85%
Operating temperature min.:	-6 °C
Operating temperature max.:	6 °C
Operating mode:	Ventilated

### Product Information (EU Regulation 2015/1094)

Energy Class:	E
Yearly and daily energy consumption:	840kWh/year - 2.3kWh/24h
Climate class:	Normal duty (cl.4)
Energy Efficiency Index (EEI):	80,00
Type of model:	vertical chilled