

## 400 Line 1 Door Freezer (-15/-24) - Stainless steel

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



729033 (A4FSF4)

1-door freezer 400lt, -15-24°C,  
stainless steel

### Short Form Specification

Item No. \_\_\_\_\_

Exterior in stainless steel. Interior in white High Impact Polystyrene with rounded corners and 45mm thick insulation. Right hinged full door with lock and heated frame, reversible on-site. Built-in refrigeration unit; manual defrost; digital control and temperature display; multiple evaporating grids. For ambient temperatures up to 38°C. HCFC, CFC and HFC free insulation and R404a refrigerant gas. Supplied with n. 4 evaporating grids.

APPROVAL: \_\_\_\_\_

### Main Features

- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- CFC and HCFC free (ecological refrigerant type: R404a, gas in foam: cyclopentane).
- Whole interior cell with rounded corners is white thermoformed polystyrene, which is impact resistant.
- Model requires only 1 phase 230V supply and can be plugged straight into an existing power socket.
- Very quiet operation.
- No joints whatsoever to eliminate dirt traps.
- Simple refrigeration system easily accessible from the rear of the units.
- Suitable for use in ambient temperatures of up to 38 ° C.


### Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models in range are finished in top quality materials to aid durability.


### Optional Accessories

- Kit of wheels for 400lt refrigerators  PNC 880348
- Pvc container with false bottom for 400lt  PNC 881072

**Front**

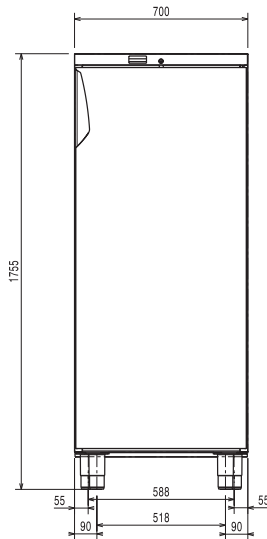


**Side**

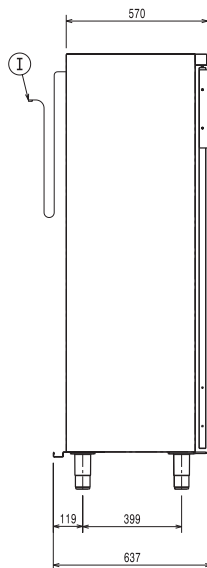

EI = Electrical inlet (power)  
RI = Refrigerant Inlet  
RO = Refrigerant Outlet

**Top**



### Electric

Supply voltage:	729033 (A4FSF4)	230 V/1 ph/50 Hz
Electrical power max.:		0.53 kW
Defrost Power:		
Current consumption:		4.27 Amps
Plug type:		CE-SCHUKO
Energy consumption (min,default):		5.34 - 9.71 kW/h

### Key Information:

Gross capacity:	400 lt
Net Volume:	
Door hinges:	
External dimensions, Width:	700 mm
External dimensions, Height:	1755 mm
External dimensions, Depth:	620 mm
Number and type of doors:	1 Full
Internal Dimensions (depth):	435 mm
Internal Dimensions (height):	1450 mm
Internal Dimensions (width):	610 mm
Net weight:	77 kg
Shipping volume:	0.98 m <sup>3</sup>
Height adjustment:	0/0 mm
Number and type of grids (included):	- 600x400

### Refrigeration Data

Control type:	Digital
Compressor power:	1/2 hp
Refrigerant type:	R404A
GWP Index:	3922
Refrigeration power:	780 W
Refrigeration power at evaporation temperature:	-29 °C
Refrigerant weight:	240 g
Min/Max internal humidity:	
Operating temperature min.:	-24 °C
Operating temperature max.:	-15 °C
Operating mode:	Static

### Product Information (EU Regulation 2015/1094)

Type of model: