

## 400 Line 1 Door Refrigerator (0/+10) - Stainless steel, 60Hz (Marine)

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



730101 (R04PVF4M)

1-door refrigerator, 400 lt, 430  
AISI, ventilated, 0+10°C -  
60Hz (Marine)

### Short Form Specification

**Item No.** \_\_\_\_\_

Exterior in stainless steel. Interior in white High Impact Polystyrene with rounded corners and 45mm thick insulation. Right hinged full door with lock, reversible on-site. Built-in refrigeration unit; ventilated operating mode; automatic defrost and evaporation of defrost water; digital control and temperature display. For ambient temperatures up to 43°C. HCFC, CFC and HFC free insulation and R134a refrigerant gas.

Supplied with n. 4 grids 600x400mm, PE coated.

### Main Features

- Digital control panel allowing the easy and precise setting and control of the internal temperature.
- Shelf runners are thermoformed and are incorporated in the internal structure to be easily cleanable.
- Whole interior cell with rounded corners is white thermoformed polystyrene, which is impact resistant.
- Very quiet operation.
- No joints whatsoever to eliminate dirt traps.
- Simple refrigeration system easily accessible from the rear of the units.
- Fan assisted cooling for even temperature distribution.
- Model equipped with roll-bond plate that has a plate installed in the internal backside of the unit equipped with a special thermostat to avoid ice formation.

### Construction

- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- All models in range are finished in top quality materials to aid durability.
- CFC and HCFC free (ecological refrigerant type: R134a, - gas in foam: cyclopentane).

### Included Accessories


- 2 of Pair of white grids for 400lt refrigerators PNC 880292

### Optional Accessories


- Pair of white grids for 400lt refrigerators PNC 880292
- Kit of wheels for 400lt refrigerators PNC 880348
- Pvc container with false bottom for 400lt PNC 881072

APPROVAL: \_\_\_\_\_

### Front

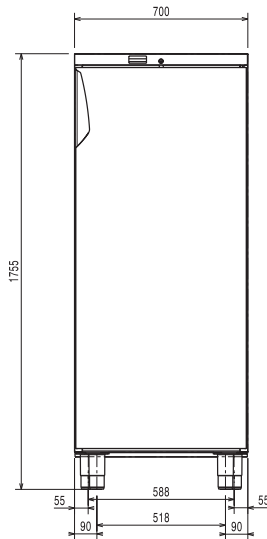


### Side

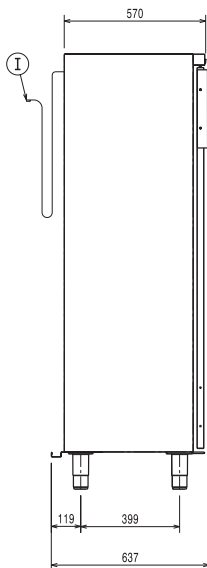

- EI = Electrical inlet (power)
- RI = Refrigerant Inlet
- RO = Refrigerant Outlet

### Top



### Electric

Supply voltage:	730101 (R04PVF4M)	220-230 V/1 ph/60 Hz
Electrical power max.:		0.22 kW

### Key Information:

Gross capacity:	400 lt
N° of doors:	1
Door hinges:	
External dimensions, Width:	700 mm
External dimensions, Height:	1755 mm
External dimensions, Depth:	620 mm
External dimensions, Depth with Doors Open:	1310 mm
Noise level:	55 dBA
Number and type of grids (included):	4 - 600x400
Type of external material:	Stainless Steel
Type of internal material:	Polystyrene
External side panels:	Stainless Steel
External top panels:	Stainless Steel
External door material:	Stainless Steel
Internal panels material:	Polystyrene
Internal side panels material:	Polystyrene

### Refrigeration Data

Control type:	Digital
Refrigerant type:	R134a
Refrigeration power at evaporation temperature:	-12 °C
Refrigerant weight:	240 g
Min/Max internal humidity:	70%/85%
Operating temperature min.:	0 °C
Operating temperature max.:	10 °C
Operating mode:	Ventilated
Cooling unit:	Built-In
Defrost type:	Automatic (air)