

## Ice Flaker 510kg/24h with 350kg bin - Water-cooled

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



730213 (IFG510WB35)

Modular ice flaker, granular,  
510 kg/24h, 350kg stainless  
steel collection bin, water-  
cooled

### Short Form Specification

Item No. \_\_\_\_\_

External panelling completely in 304 AISI stainless steel. The ice-making method (crushing system) guarantees compact, hygienically pure crushed ice that is resistant to melting. R452A refrigerant. Water cooled. Container capacity Kg: 350

### Main Features


- Compliant to CE requirements for safety.
- Food grade ABS interior.
- Fully automatic in operation.
- Suitable for gravity drain only (no pumps needed).
- Rated output is at an ambient air temperature of 21°C and water supply temperature of 15°C.
- Model available in water-cooled version.
- The ice-making method (crushing system) guarantees compact, hygienically pure crushed ice that is resistant to melting.
- Bin included.

### Construction


- Plug as standard (schuko type).
- AISI 304 stainless steel exterior.
- Supplied with flexible water supply and drain hoses.
- Stainless steel spray arms removable without the use of tools.
- Adjustable feet 110-150 mm.
- Environmentally friendly: R452a as refrigerant gas.

APPROVAL: \_\_\_\_\_

### Front

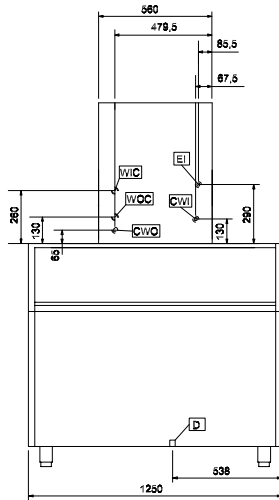

### Side

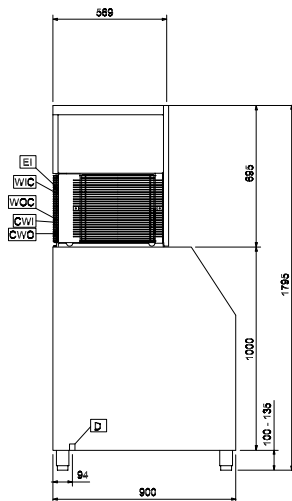


CWI1 = Cold Water inlet 1      WOC = Cooling water outlet

D = Drain

EI = Electrical inlet (power)

WIC = Cooling water inlet

### Top



Doc No : ID730212  
ID730213

### Electric

Supply voltage:

730213 (IFG510WB35)

200-240 V/1N ph/50 Hz

Electrical power max.:

1.7 kW

### Capacity:

Bin capacity:

350 kg

### Key Information:

External dimensions, Width: 1250 mm

External dimensions, Height: 1795 mm

External dimensions, Depth: 900 mm

Net weight: 207 kg

Output: 510 kg/day