

## CRIO Line CP 2 Door Refrigerated Counter, 265lt - Remote - No top

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



712107 (AK2R8AA)

2-door refrigerated counter, -2+10°C, AISI 304, without worktop, remote

### Short Form Specification

#### Item No. \_\_\_\_\_

Internal and external doors, front and side panels in 304 AISI stainless steel. No worktop. N.2 doors. Remote refrigeration unit. Ventilated. Refrigerant R134a. Extra insulation: 90mm body insulation to minimize energy dispersion. Digital control panel. Completely automatic defrosting and automatic evaporation of defrost water obtained by hot gas. Temperature range: -2+10°C. CFC and HCFC free. Feet in 304 AISI stainless steel, adjustable in height.

Supplied with n. 2x1/1GN Rilsan grids.

### Main Features

- Adjustable temperature range from -2 °C to +10 °C to suit meat, fish and dairy storage requirements.
- Large digital white-digit display with humidity selection button (3 preset level), internal temperature display and setting, manual activation of defrost cycle and turbo frost cycle (to rapidly cool warm loads).
- Equipped with Airflow system: forced air circulation system for rapid cooling and even temperature distribution within the cell.
- Tropicalized unit (43°C ambient temperature).
- Fitted with 90 mm thickness of cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m\*K) and lowest environmental impact (GWP=3).
- 0mm clearance installation space: tower configuration cooling unit guarantee performance with frontal ventilation only; this unique solution allows installation against the wall or side by side with other appliances, even on the cooling unit side to maximize the use of kitchen space.
- IQ Defrost - fully automatic defrost starts only when ice is actually building-up in the evaporator and adapts the defrosting duration to guarantee perfect ice removal while optimizing energy efficiency consumption.
- Combination of doors and drawers to suit any configuration needed, with the possibility to change the configuration on site. Right cooling unit available on request.
- Fully compliant HACCP digital control: when temperature exceeds critical limits, acoustic and visual alarms are activated. Up to two months of event are kept in memory.
- Anti-tilt runners accept GN 1/1 containers.
- Self closing stainless steel doors (< 90°).
- Certified safety CE requirements.
- Prearranged to fit RS485 port to facilitate connection to a remote computer and integrated HACCP systems.

### Construction

- 2 compartments with 2 doors.
- Interior base with rounded corners, pressed from a single sheet.
- Ease of cleaning and high hygiene standards thanks to the rounded internal corners, the easily removable runners, grids and air conveyors.
- Removable triple-chamber balloon magnetic gasket to improve insulation and reduce energy consumption and ease of cleaning.
- Internal structure with 15 charging positions (3 cm pitch) available to host GN 1/1 grids, ensuring higher net capacity and a greater storage space.
- Mounted on stainless steel feet to give 150 mm (-5/+50 mm) clearance for ease of cleaning the floor.
- Remote refrigeration unit.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Fault code display.
- CFC and HCFC free (ecological refrigerant type: R134a, - gas in foam: cyclopentane).
- Extractable cooling unit to facilitate maintenance.
- IP21 protection index.


APPROVAL: \_\_\_\_\_

### **Included Accessories**

- 2 of Kit 1/1 gray rilsan grid and 2 side runners PNC 881109 for refrigerated counters

### **Optional Accessories**

- Remote unit -2+10°C for 670lt refrigerated cabinets and HD Line counters PNC 880231
- 2x1/2-drawer kit refrigerated counter PNC 881079
- 3x1/3-drawer kit refrigerated counter PNC 881080
- 1/3 and 2/3 bottle drawer kit for refrigerated counters PNC 881081
- 1/1GN gray rilsan grid for refrigerated counters PNC 881107
- 2 side runners for 1/1 GN ecostore refrigerated counters PNC 881108
- Kit 1/1 gray rilsan grid and 2 side runners for refrigerated counters PNC 881109
- 1/1 GN plastic container, H=65 mm PNC 881110
- 1/1 GN plastic container, H=100 mm PNC 881111
- 1/1 GN plastic container, H=150 mm PNC 881112
- Lock for refrigerated counters with 2 compartments PNC 881152

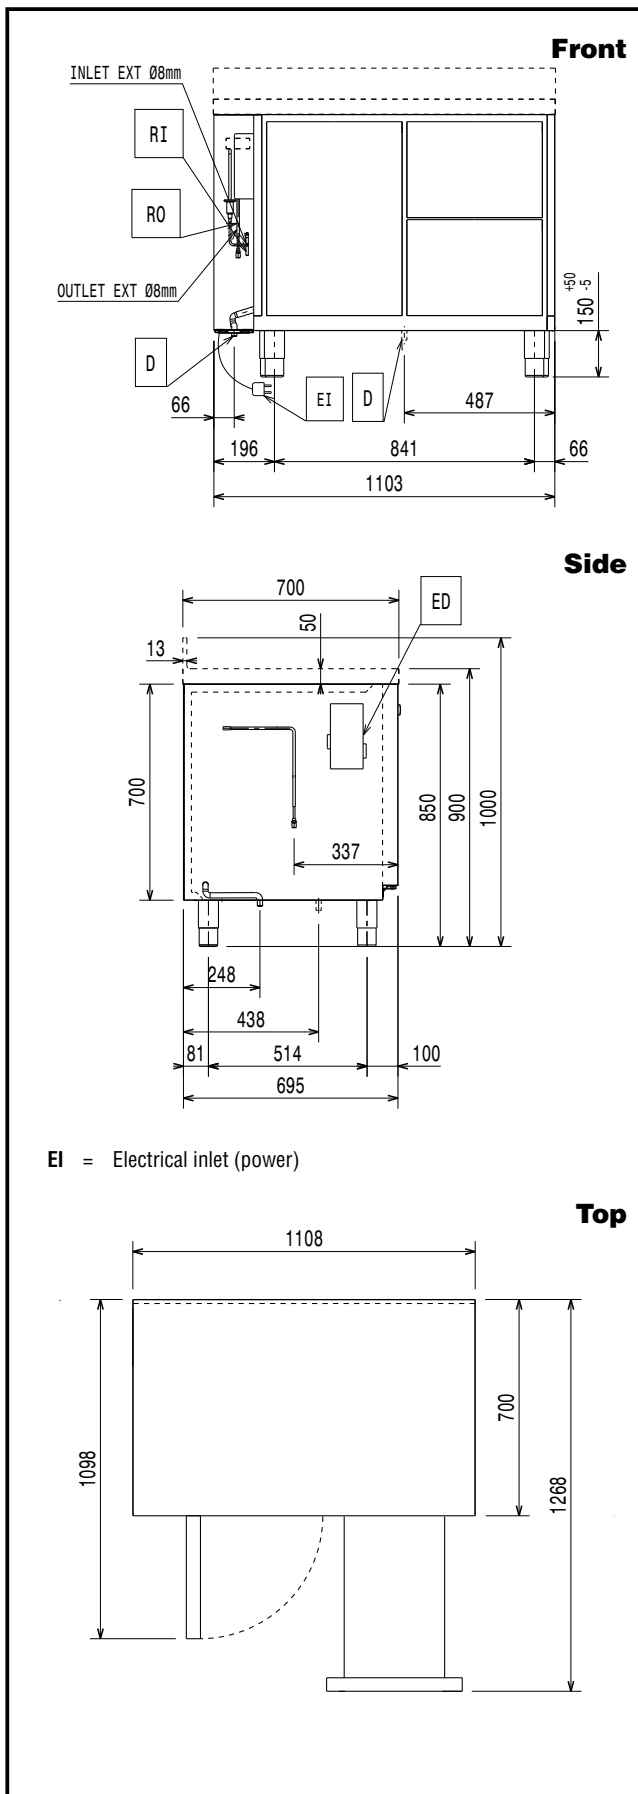

### Electric

|                        |                  |                         |
|------------------------|------------------|-------------------------|
| Supply voltage:        | 712107 (AK2R8AA) | 220-240 V/1 ph/50/60 Hz |
| Electrical power max.: |                  | 0.03 kW                 |
| Defrost Power:         |                  | 0.22 kW                 |
| Current consumption:   |                  | 0.3 Amps                |
| Plug type:             |                  | CE-SCHUKO               |

### Key Information:

|                               |                     |
|-------------------------------|---------------------|
| Gross capacity:               | 290 lt              |
| Door hinges:                  | 1 Left+1 Right      |
| External dimensions, Width:   | 1103 mm             |
| External dimensions, Height:  | 850 mm              |
| External dimensions, Depth:   | 700 mm              |
| Internal Dimensions (depth):  | 560 mm              |
| Internal Dimensions (height): | 550 mm              |
| Internal Dimensions (width):  | 798 mm              |
| Shipping volume:              | 1.08 m <sup>3</sup> |
| Depth with doors open:        | 1110 mm             |
| Height adjustment:            | -5/50 mm            |

### Refrigeration Data

|                             |            |
|-----------------------------|------------|
| Control type:               | Digital    |
| Refrigerant type:           | R134a      |
| GWP Index:                  | 1300       |
| Operating temperature min.: | -2 °C      |
| Operating temperature max.: | 10 °C      |
| Operating mode:             | Ventilated |