

Saladette HD Saladette with 3 doors, 440lt

ITEM # _____
 MODEL # _____
 NAME # _____
 SIS # _____
 AIA # _____



727520 (SAL3DA)

3-door refrigerated counter, saladette with raised container support -2+4°C, 440lt, AISI 304

Short Form Specification

Item No. _____

External and internal in AISI 304 stainless steel. Worktop thickness mm50. Insulation thickness mm60. N. 3 full doors. Built-in refrigeration unit. Ventilated operating mode. Electronic control with external digital temperature display. Operating temperature: +2+4°C. For ambient temperature up to +32°C. CF and HCFC free. R404a gas in refrigeration circuit. Gas in foam: Cyclopentane. Supplied with 3X1/1GN grey rilsan grids. Mounted on wheels.

Main Features

- 60 mm insulation for energy saving.
- Anti-tilt runners accept GN 1/1 containers.
- CFC and HCFC free (ecological refrigerant type: R404a, gas in foam: cyclopentane).
- Forced air circulation for rapid cooling and an even temperature distribution.
- Suitable for use in ambient temperatures of up to 32 °C.
- Adjustable temperature range from -2 to +10°C to suit meat and different dairy storage requirements.
- No cross-contamination between upper and lower part (nothing will fall in the lower compartment).
- Easy-to-use control panel.
- Electronic control with external digital temperature display.

Construction

- Access to all components from the front.
- Built-in compressor to suit operating conditions.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Mounted on wheels.
- Rounded internal corners for ease of cleaning.
- Worktop in AISI 304 Stainless steel with a 50 mm profile.
- Constructed from AISI 304 Stainless steel throughout to meet the highest hygiene standards.
- Heavy duty, balanced stainless steel lid, easy to remove and turn to facilitate cleaning.
- Large front working top (400 mm depth).
- Easy to clean: removable internal support structure with no dirt traps for unbeatable hygiene.
- If needed, working top can be removed for easier handling during installation (in case of narrow doors).


Included Accessories

- 1 of 1/1 GN grey "rilsan" grid PNC 881435

Optional Accessories

- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- 1/1 GN grey "rilsan" grid PNC 881435
- Lock for refrigerated counters PNC 881499

APPROVAL: _____

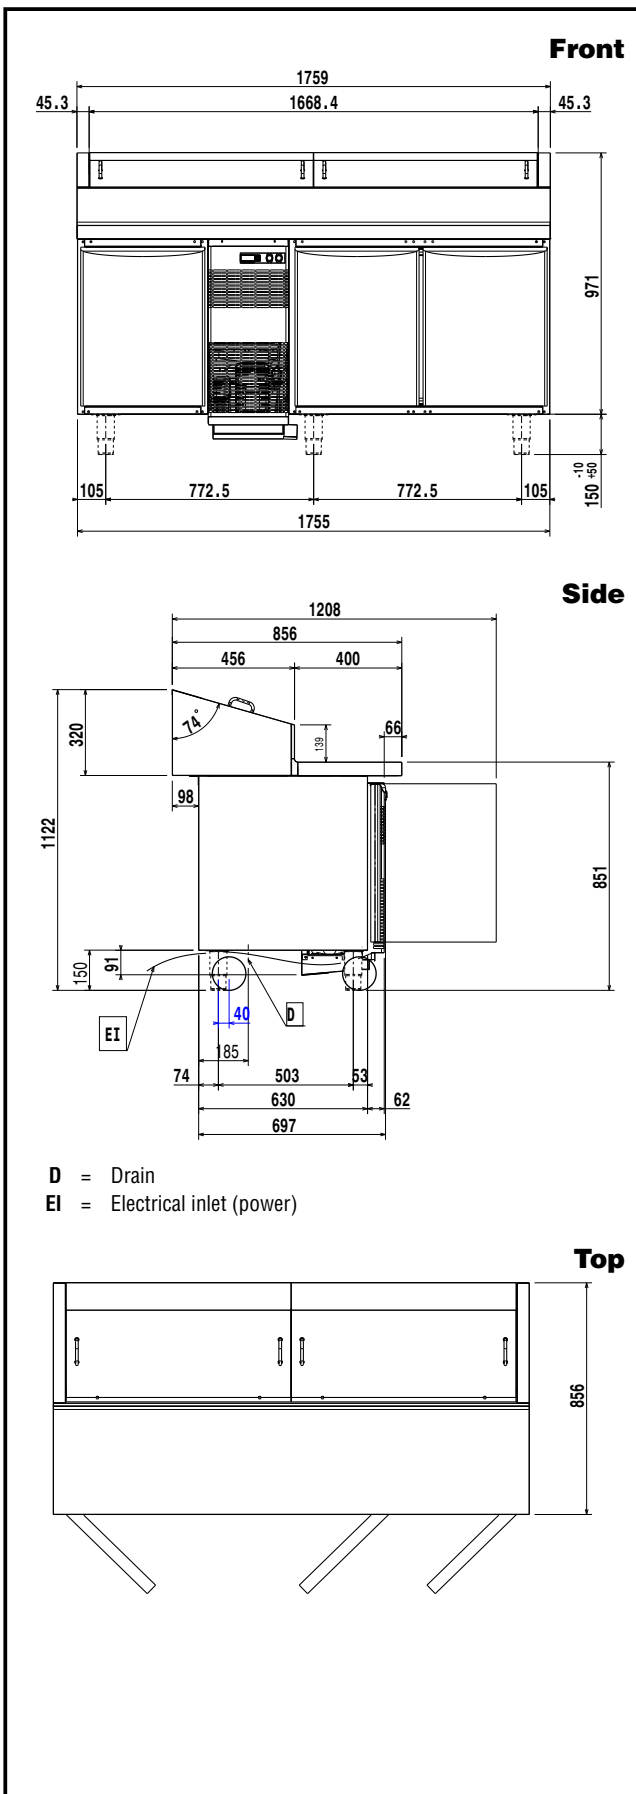

Electric

Supply voltage:

727520 (SAL3DA) 230 V/1 ph/50 Hz

Energy consumption (min,default): 0 - 12.26 kW/h

Key Information:

Gross capacity:	440 lt
Door hinges:	
External dimensions, Width:	1759 mm
External dimensions, Height:	1121 mm
External dimensions, Depth:	856 mm
External dimensions, Depth with Doors Open:	1110 mm
Type of external material:	304 AISI
Type of internal material:	304 AISI
Internal side panels material:	304 AISI

Built-in Compressor and Refrigeration Unit

Refrigeration Data

Compressor power:	3/4 hp
Refrigerant type:	R404A
Refrigeration power:	1638 W
Refrigerant weight:	535 g
Operating temperature min.:	2 °C
Operating temperature max.:	4 °C