

**Warewashing  
Medium pre-wash zone for green&clean  
multi-rinse Rack Type with Energy  
Saving Device, ZERO LIME**

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



**535036 (EMPWEEW)**

Medium pre-wash zone for Electrolux green&clean multi-rinse Rack Type Dishwasher with Energy Saving Device, ZERO LIME Device, WRAS/Watermark approval

### Short Form Specification

**Item No.** \_\_\_\_\_

Unit to be Electrolux green&clean medium pre-wash module suitable to be installed with Electrolux green&clean multi-rinse rack type dishwasher having Energy Saving Device. Electrical characteristics to be \_\_ 400V three phase operation. The pre-wash section uses only cold water providing to upper and lower arms so food remains are not "baked" onto the plates in order to have better pre-wash performance. ZERO LIME device automatically de-scales the whole hydraulic circuit and all washing & rinsing chambers. Insulated door with easy access for silent operation and heat preservation. Construction in AISI 304 stainless steel. CLEAR BLUE filtering system removes majority of soil from the wash water to ensure clean water for long time. Built-in drain valve in the tank allows automatic dump and fill to refresh the water in the tank without interruption. Standard end of the day self-cleaning cycle to wash chamber completely including the internal door. Suitable for any feeding direction of the dishwasher thanks to easy reversibility on-site. Full pre-arrangement to be connected with Electrolux green&clean multi-rinse rack type dishwasher without any modification.

### Main Features

- The unit must be connected with Electrolux green&clean multi-rinse rack type dishwasher with Energy Saving Device and ZERO LIME device.
- Automatic Descaling Cycle ensures total scale removal from the hydraulic circuit and the pre-wash chamber allowing ultimate performances and lower energy consumption thanks to highly efficient heating elements.
- Multi-stage advanced filtering system removes soil from the pre-wash water providing cleaner water thus ensuring better washing performance.
- Manual process of pre-wash spraying replaced by automatic prewash module before the main wash section.
- Pre-wash section uses cold water so food remains are not "baked" onto the plates in order to have better pre-wash performance.
- Auto-start/stop ensures that the zone runs only when a rack is passing through it. This reduces both water, energy consumption and noise.
- Large counter balanced inspection door allows unrestricted all-round access to the internal area. Door is insulated with injected foam. This adds strength as well as reduces noise and heat loss.
- IP25 protection against water jets, solid objects and small animals (larger than 6 mm).
- Built-in drain valve in the tanks allows automatic dump and fill to refresh the water in the tank without any interruption of the washing process.
- Automatic drain, clean and sanitize cycles featured as standard. The internal chamber, including the internal door is completely cleaned or sanitized avoiding bacteria proliferation for maximum hygiene and reducing manual work/time for operator.
- The feeding direction can be either left to right or right to left as it's reversible on site.
- Adjustable feet for full access underneath the machine for cleaning.

### Construction

- The unit is built on modularity concept to easily connect with multi-rinse rack type dishwasher without any modification including power, inlet water, drain water, detergent and rinse aid connections.
- All main components made in heavy duty anti-corrosive 304 type stainless steel: internal chamber, external, front and side panels, pre-wash arms and rack transportation system.
- Deep drawn pressed tank with fully rounded corners, sloped towards the drain to prevent dirt buildup, provides fast drainage in just a few minutes. With no welding points the pressed tank offers a guaranteed water tight solution.

### Optional Accessories

- Kit to convert pre-wash module to wash module  PNC 865281


**APPROVAL:** \_\_\_\_\_




# Electrolux

## Warewashing Medium pre-wash zone for green&clean multi- rinse Rack Type with Energy Saving Device, ZERO LIME


Front

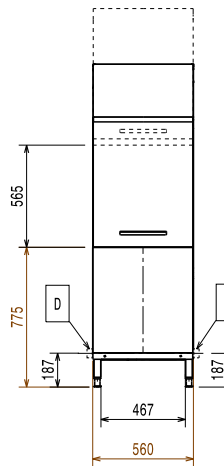

Side

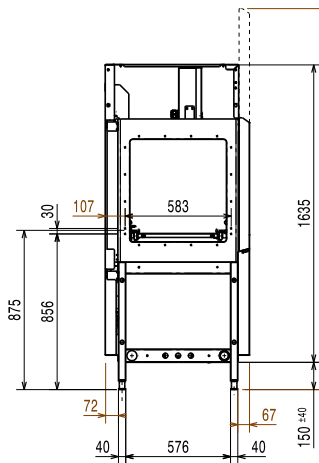

Top



- CWI = Cold Water Inlet
- D = Drain
- EI = Electrical inlet (power)
- EO = Electrical Outlet
- EQ = Equipotential screw
- ES = Electrical signal IN/OUT
- U = USB port
- WI = Water inlet

XP = Chemical probe/sensor

### Electric

Supply voltage:

535036 (EMPWEEW) 380-415 V/3N ph/50 Hz

Default Installed Power:

7.37 kW

Pre-wash tank heating elements:

7 kW

Pre-wash tank heating elements are activated only during sanitation cycle.

Pre-wash pump size:

0.37 kW

### Water:

Pre-wash tank size:

### Key Information:

Pre-wash temperature: 10 - 40 °C

External dimensions, Width: 560 mm

External dimensions, Height: 1785 mm

External dimensions, Depth: 825 mm

For transportation purpose only, the depth can be reduced to 795mm by removing the door handle.

Height with door open: 2095 mm

Charging hole size (width): 530 mm

Charging hole size (height): 490 mm

Net weight: 110 kg

Shipping weight: 132 kg

Shipping height: 2025 mm

Shipping width: 695 mm

Shipping depth: 910 mm

Shipping volume: 1.28 m<sup>3</sup>

Noise level: <62 dBA

Reference norm used to measure the noise: IEC60335-2-58 annex AA.



Warewashing  
Medium pre-wash zone for green&clean multi-rinse Rack Type with  
Energy Saving Device, ZERO LIME  
The company reserves the right to make modifications to the products  
without prior notice. All information correct at time of printing.

2019.02.21