

Saladette
Heavy Duty Saladette, 440lt with 2 doors and 2½ drawers and UK plug


ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____

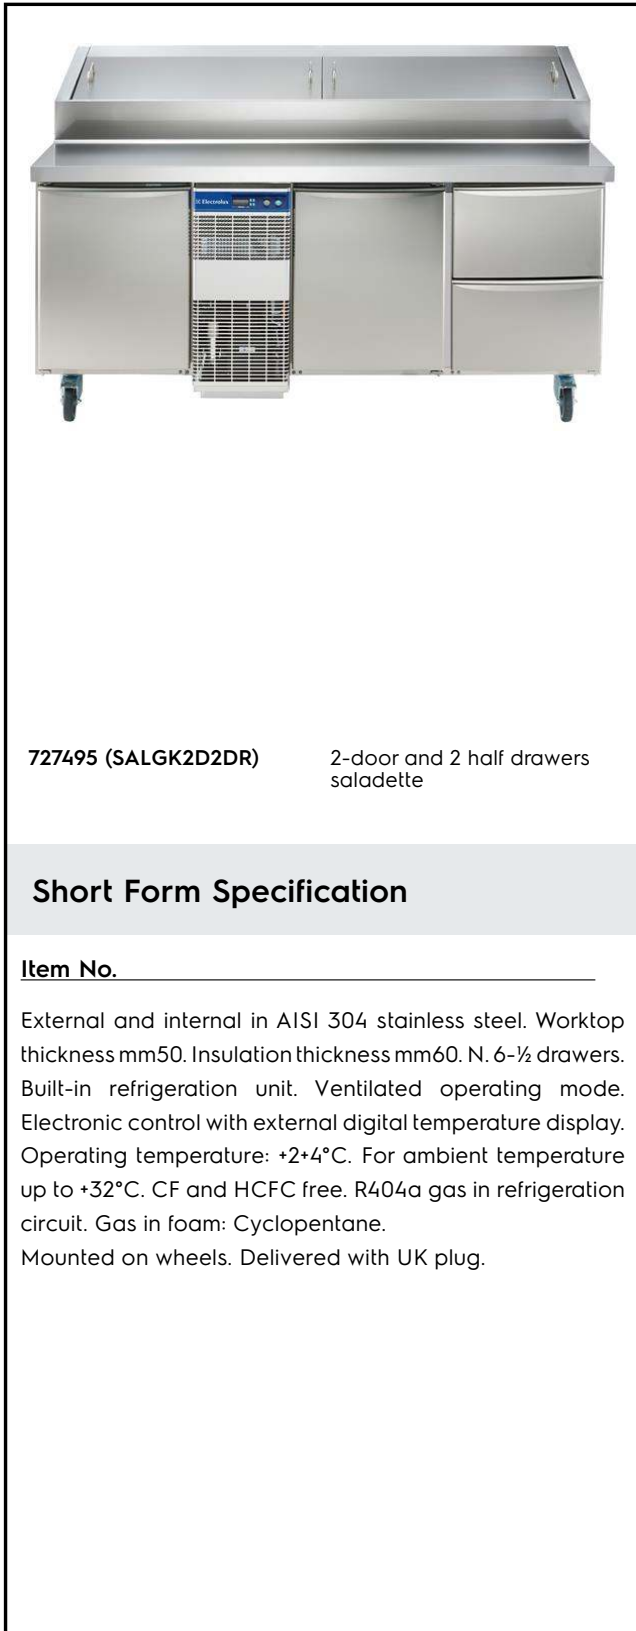

727495 (SALGK2D2DR) 2-door and 2 half drawers saladette

Short Form Specification

Item No. _____

External and internal in AISI 304 stainless steel. Worktop thickness mm50. Insulation thickness mm60. N. 6-½ drawers. Built-in refrigeration unit. Ventilated operating mode. Electronic control with external digital temperature display. Operating temperature: +2+4°C. For ambient temperature up to +32°C. CF and HCFC free. R404a gas in refrigeration circuit. Gas in foam: Cyclopentane. Mounted on wheels. Delivered with UK plug.

Main Features

- 60 mm insulation for energy saving.
- Anti-tilt runners accept GN 1/1 containers.
- CFC and HCFC free (ecological refrigerant type: R404a, gas in foam: cyclopentane).
- Forced air circulation for rapid cooling and an even temperature distribution.
- Suitable for use in ambient temperatures of up to 32 °C.
- Adjustable temperature range from -2 to +10° C to suit different dairy storage requirements.
- No cross-contamination between upper and lower part (nothing will fall in the lower compartment).
- Easy-to-use control panel.
- Electronic control with external digital temperature display.
- Easy-to-use, electronic control panel. Fully programmable.
- Electronic microprocessor control with external digital temperature display.

Construction

- Access to all components from the front.
- Built-in compressor to suit operating conditions.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Mounted on wheels.
- Rounded internal corners for ease of cleaning.
- Worktop in AISI 304 Stainless steel with a 50 mm profile.
- Constructed from AISI 304 Stainless steel throughout to meet the highest hygiene standards.
- Drawers made in 304 AISI stainless steel.
- Heavy duty, balanced stainless steel lid, easy to remove and turn to facilitate cleaning.
- Large front working top (400 mm).
- Easy to clean: removable internal support structure with no dirt traps for unbeatable hygiene.
- If needed, working top can be removed for easier handling during installation (in case of narrow doors).
- Delivered with UK plug.

APPROVAL: _____




Included Accessories

- 6 of 1/1GN grey rilsan grid PNC 881435

Optional Accessories

- Kit integrated HACCP for digital refrigerators (IR33) PNC 880252
- 1/1GN grey rilsan grid PNC 881435
- Lock for refrigerated counters PNC 881499
- Kit 3 drawers 1/3+rack-HD refrigerated counters - not for freezer version PNC 881515
- Kit 1 bottler+1 drawer for refrigerated counters - not for freezer version PNC 881516

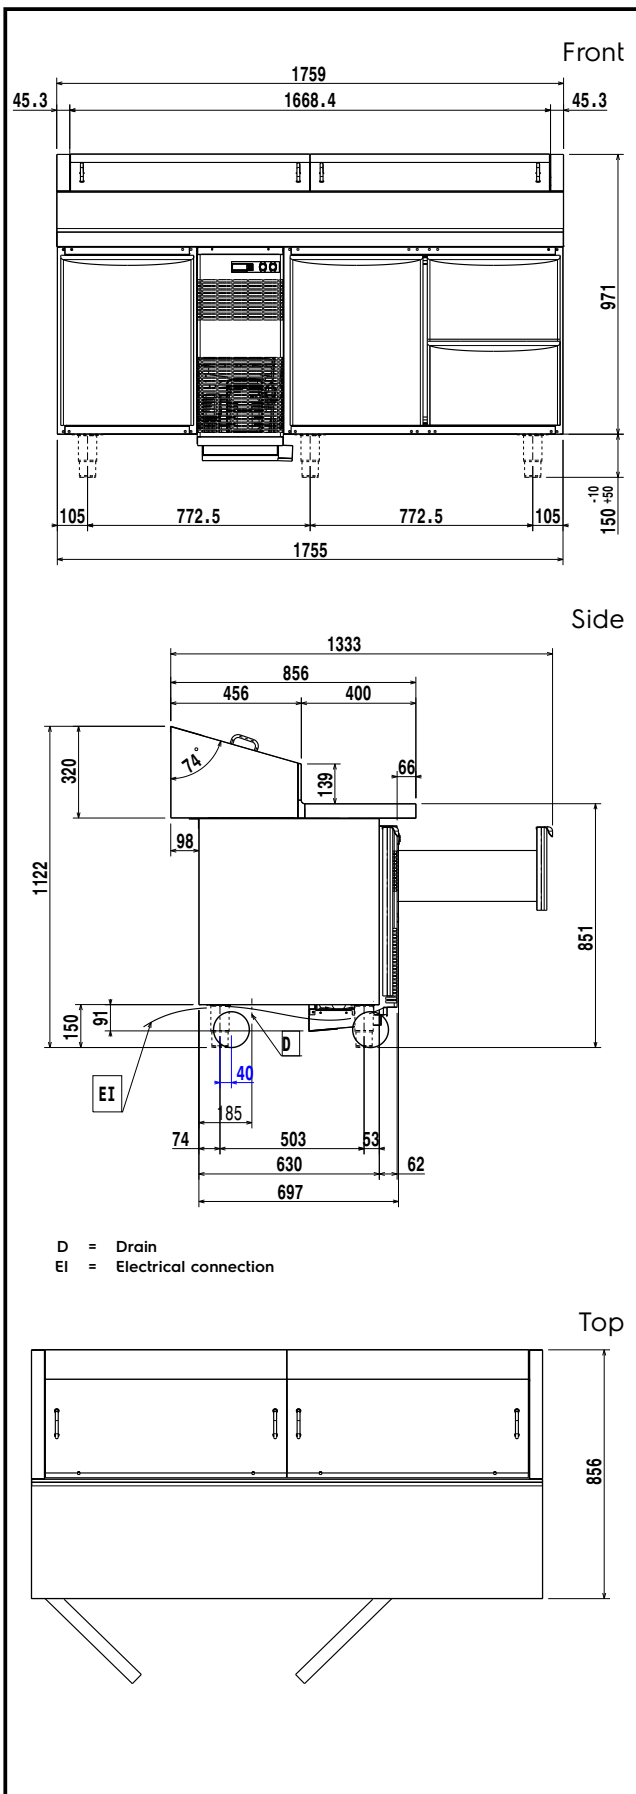

Electric

Supply voltage:
727495 (SALGK2D2DR) 230 V/1 ph/50 Hz

Key Information

Gross capacity 440 lt
 External dimensions, Width 1759 mm
 External dimensions, Height 1121 mm
 External dimensions, Depth 856 mm
 External dimensions, Depth with Doors Open: 1110 mm
 Type of external material: 304 AISI
 Type of internal material: 304 AISI
 Internal side panels material 304 AISI
 N° of drawers 2x1/2

Built-in Compressor and Refrigeration Unit

Refrigeration Data

Refrigerant type: R404a
 Refrigerant weight: 535 g
 Operating temperature min.: 2 °C
 Operating temperature max.: 4 °C