



Electrolux

air-o-steam Touchline Electric Combi Oven 8GN 1/1

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



Electrolux

Touchline Electric Combi Oven 8GN 1/1
air-o-steam



267212
(AOS101ETH)

air-o-steam with high resolution touch screen control, electric, 8x1/1GN, 3 cooking modes (automatic, recipe program, manual), air-o-clima and air-o-clean functions, 80mm pitch

Short Form Specification

Item No.

Convection-steamer with a high resolution touch screen control panel (translated in 30 languages).

air-o-clima: real humidity control based upon Lambda sensor for consistent results independent from the food load. With hot air cycles air-o-clima exhausts any excess humidity generated by the food. A dedicated steam generator guarantees a continuous supply of fresh steam at all times. Manual injection of water to add additional moisture in the cell.

air-o-flow: fresh air is blown into the oven from the outside, after it is pre-heated it is pulled through the bi-functional fan, guaranteeing cooking evenness.

air-o-clean: built-in cleaning system with four automatic pre-set cycles. Green cleaning functions can be set to save energy (skip drying function), water (reduce water consumption) and rinse aid (skip rinse aid).

Three cooking modes: Manual (cooking cycle, temperature, time and advance features); Automatic - (select family and food type + 3 special cycles-LTC, proofing, regeneration); Programs (recipe selection from page with 1000 free 16-phase programs and search button). Recipes can be saved in a USB key for replication in other ovens.

Automatic pre-heating and pre-cooling. Half power, half speed and pulse ventilation controls. Food probe with 6 temperature sensors (the lowest one drives the cycle). Double-glass door with book-like opening maintains a cool external temperature and incorporates a drip pan to collect excess condensation avoiding wet floors. Halogen lighting in the cooking chamber.

Side panels and interior in AISI 304 stainless steel.

Supplied with n.1 tray rack 1/1GN, 80mm pitch.

Main Features

- Automatic mode: choosing family and food type, the oven automatically selects the appropriate cooking climate, temperature and time. A maximum of 60 personalised presets per family can be saved. Three special automatic cycles available:
 - Low Temperature Cooking cycle (LTC) to minimize weight loss, maximizing food quality for large pieces of meat.
 - Reheating cycle: efficient humidity management to quickly reheat.
 - Proofing cycle: uses the air-o-clima function to create the perfect proofing conditions.
- Manual mode: traditional cooking style by manually selecting the parameters. Traditional cooking cycles available:
 - Dry, hot convection cycle (max. 300 °C): ideal for low humidity cooking.
 - Low temperature Steam cycle (max. 100 °C): ideal for sous-vide (vacuum packed) re-thermalization and delicate cooking.
 - Steam cycle (100 °C): seafood and vegetables.
 - High temperature steam (max. 130 °C).
 - Combination cycle (max. 250 °C): combining convected heat and steam to obtain humidity controlled cooking environment, accelerating the cooking process and reducing weight loss.
- Programs mode: a maximum of 1000 recipes can be stored in the oven's memory, to recreate the exact same recipe at any time. The recipes can be group in 16 different categories to better organize the menu. 16-step cooking programs also available.
- air-o-clima™: Lambda sensor controlled automatic humidity adjustment of cooking environment.
- MultiTimer function to manage a sequence of up to 14 different cooking cycles, improving flexibility and ensuring excellent cooking results. Can be saved up to 70 multitimers programs.
- Guided descaling function to guide operator during boiler descaling phase (from "Setting" mode).
- air-o-flow: fresh air from the outside is directed to the bi-functional fan, becomes pre-heated and then pushed into the cooking chamber to guarantee an even cooking process.
- 6-point multi sensor core temperature probe for maximum precision and food safety.
- USB connection: to download HACCP and FSC data, upload the recipes and interface setting.
- Food safe control monitors the cooking process to comply with HACCP standards. HACCP management to record cooking procedure available upon request.
- Sous-vide USB probe to ensure excellent cooking results even with vacuum-packed products (optional accessory).
- Supplied with n.1 tray rack 1/1GN, 80mm pitch.
- air-o-clean™ automatic and built-in self cleaning system (4 automatic) with "Green" functions to save

APPROVAL: _____



Experience the Excellence
www.professional.electrolux.com



energy, water and rinse aid.

- Fan speeds: full, half speed for delicate pulse cooking such as for baking cakes and pulse ventilation for baking and low temperature cooking. The "pulse utility" is also perfect for keeping food warm at the end of the cooking cycle.

Construction

- IPX 5 spray water protection certification for easy cleaning.
- 304 AISI stainless steel construction throughout.
- Seamless hygienic internal chamber with all rounded corners for easy cleaning.
- Double thermo-glazed door with open frame construction, for cool outside door panel. Swing hinged easy-release inner glass on door for easy cleaning.
- Swing hinged front panel for easy service access to main components.
- Integrated spray hose included.

Included Accessories

- 1 of Control panel filter for 6&10xGN1/1 ovens PNC 922246

Optional Accessories

- Exhaust hood without fan for 6&10 1/1GN ovens. It is mandatory to use the flue condenser (640413) on installation with gas ovens PNC 640791
- Exhaust hood with fan for 6&10x1/1 GN ovens. It is mandatory to use the flue condenser (640413) on installation with gas ovens PNC 640792
- Integrated odourless hood for air-o-steam/air-o-convect 6GN1/1 and 10GN1/1, electric PNC 640797
- Water softener with cartridge and flow meter for 6 & 10 GN 1/1 ovens (low-medium steam usage - less than 2hrs per day full steam) PNC 920002
- Water softener with cartridge and flow meter (high steam usage) PNC 920003
- Water softener with salt for ovens with automatic regeneration of resin PNC 921305
- Resin sanitizer for water softener (921305) PNC 921306
- Wheel kit for 6 & 10 GN 1/1 and 2/1 GN oven base (not for the disassembled one) PNC 922003
- Trolley for 6&10x1/1GN ovens and bcf PNC 922004
- Tray rack with wheels for 10x1/1GN ovens and bcf, 65mm pitch (std) PNC 922006
- Tray rack with wheels for 8x1/1GN ovens and bcf, 80mm pitch PNC 922009
- Kit 4 adjustable feet for 6&10 GN PNC 922012
- Rack for 30 plates for 10x1/1GN ovens and bcf, 65mm pitch with wheels PNC 922015
- Pair of AISI 304 stainless steel grids, GN 1/1 PNC 922017
- Tray support for air-o-steam 6&10x1/1GN open base PNC 922021
- Pair of grids for whole chicken (8 per grid - 1,2kg each), GN 1/1 PNC 922036

- Pastry tray rack with wheels, for 10x1/1GN ovens and bcf, 80mm pitch (8 runners). Suitable for 400x600mm pastry trays PNC 922066
- Rack for 23 plates for 10x1/1GN ovens and bcf, 85mm pitch with wheels PNC 922071
- Slide-in rack and handle for ovens 6&10x1/1GN PNC 922074
- Grid for whole chicken (4 per grid - 1,2kg each), GN 1/2 PNC 922086
- Reinforced tray rack with wheels, lowest support dedicated to a grease collection tray, for 10x1/1GN, 64mm pitch PNC 922099
- External connection kit for detergent and rinse aid PNC 922169
- External side spray unit (needs to be mounted outside and includes support to be mounted on the oven) PNC 922171
- Fat filter for 10 1/1 and 2/1 GN combi steamers (gas and electric) and convection ovens (electric) PNC 922178
- Baking tray for 5 baguettes in perforated aluminum with silicon coating, 400x600x38mm PNC 922189
- Baking tray with 4 edges in perforated aluminum, 400x600x20mm PNC 922190
- Baking tray with 4 edges in aluminum, 400x600x20mm PNC 922191
- Standard open base with tray support for 6&10x1/1GN PNC 922195
- Basket for detergent tank (Compatible with OS1192-OS1193-Ecolab) - wall mounted PNC 922209
- Holder for detergent tank (Compatible with OS1192-OS1193-Ecolab) , to mount on open base PNC 922212
- Cupboard base and tray support for 6&10x1/1GN ovens PNC 922223
- Hot cupboard base with humidifier for 6&10x1/1GN ovens, with support for 1/1GN and 600x400mm trays PNC 922227
- Pair of frying baskets PNC 922239
- Heat shield for stacked ovens 6x1/1GN on 10x1/1GN PNC 922245
- Control panel filter for 6&10xGN1/1 ovens PNC 922246
- Heat shield for 10x1/1GN PNC 922251
- Double-step door opening kit PNC 922265
- Grid for whole chicken (8 per grid - 1,2kg each), GN 1/1 PNC 922266
- Kit integrated HACCP for ovens PNC 922275
- USB probe for sous-vide cooking PNC 922281
- Drain kit (diam. 50 mm) for 6&10 GN 1/1 and 10GN 2/1 ovens PNC 922283
- Pastry runners (400x600 mm) for 6 & 10 GN1/1 oven bases PNC 922286
- Grease collection kit including tray and trolley PNC 922287
- Bakery rack kit for 10 GN1/1 ovens PNC 922292
- Stacking kit for electric 6x1/1 GN oven placed on electric 6&10x1/1 GN oven PNC 922319
- Kit flanged feet for 6&10 1/1GN ovens PNC 922320
- Grease collection tray, GN 1/1, H=100 mm PNC 922321
- Trolley for slide-in rack on stacked ovens (needed for the oven that will be stacked below) PNC 922323





- Universal skewer rack PNC 922326
- 4 long skewers PNC 922327
- Grease collection tray, GN 1/1, H=40 mm PNC 922329
- Wheels for stacked oven 2x 6 GN 1/1 or 6 GN 1/1 on 10 GN1/1 PNC 922333
- Smoker for lengthwise and crosswise oven (4 kinds of smoker wood chips are available on request) PNC 922338
- Kit check valve PNC 922347
- Multipurpose hook PNC 922348
- Stacking table for 6&10x1/1 GN oven on 5x1/1GN blast chiller/freezer PNC 922363
- Thermal cover for 10 GN 1/1 oven and blast chiller freezer PNC 922364
- Flat baking tray with 2 edges, GN 1/1 PNC 925006







Electrolux

air-o-steam Touchline Electric Combi Oven 8GN 1/1

Front

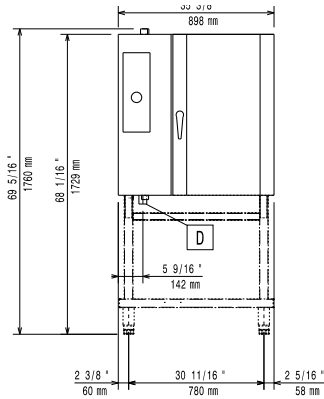


Side

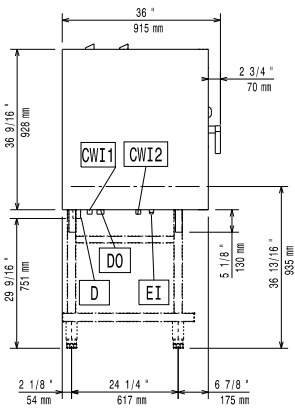

- CW1 = Cold Water inlet 1
- CW2 = Cold Water Inlet 2
- D = Drain
- DO = Overflow drain pipe
- EI = Electrical inlet (power)

Top

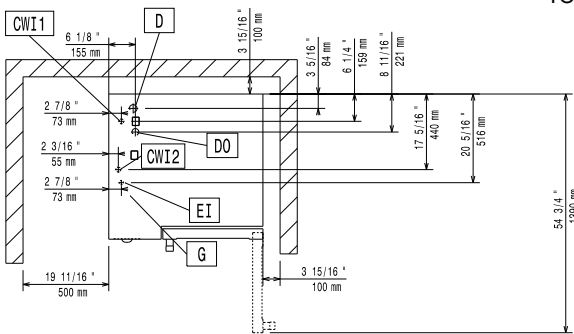

Electric

Supply voltage:
267212 (AOS101ETH1) 380-400 V/3N ph/50/60 Hz
Electrical power max.: 17.5 kW
Circuit breaker required

Water:

Water inlet "CW" connection: 3/4"
Total hardness: 5-50 ppm
Pressure, bar min/max: 1.5-4.5 bar
Drain "D": 1 1/4"
Electrolux recommends the use of treated water, based on testing of specific water conditions.
Please refer to user manual for detailed water quality information.

Installation:

5 cm rear and right hand sides.

Clearance:

Suggested clearance for service access: 50 cm left hand side.

Capacity:

Trays type: 8 - 1/1 Gastronorm
Max load capacity: 50 kg

Key Information:

External dimensions, Width: 898 mm
External dimensions, Height: 1058 mm
External dimensions, Depth: 915 mm
Net weight: 156 kg
Shipping weight: 171 kg
Shipping volume: 1.22 m³



air-o-steam
Touchline Electric Combi Oven 8GN 1/1

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.

2019.05.20