



# Electrolux

## Digital Cabinets Roll-in Compact Refrigerator 750 lt - 1 door

ITEM # \_\_\_\_\_

MODEL # \_\_\_\_\_

NAME # \_\_\_\_\_

SIS # \_\_\_\_\_

AIA # \_\_\_\_\_



726650 (RI075RIF)

1-door roll-in refrigerator  
750lt, 0+10°C, AISI 304

### Short Form Specification

**Item No.** \_\_\_\_\_

External and internal in AISI 304 stainless steel. Insulation thickness mm60. Right hinged full door with lock. Bottom door gasket adjustable. Built-in refrigeration unit; ventilated operating mode; digital control; evaporator; automatic defrost; external digital temperature display; high/low humidity switch. Operating temperature 0+10°C. For ambient temperatures up to 43 °C. CFC and HCFC free. R134a gas in refrigeration circuit. Gas in foam: Cyclopentane.

### Main Features

- Excellent space optimisation thanks to the compact dimensions (footprint 0.56m<sup>2</sup>).
- One full door.
- The operating temperature can be adjusted from 0 to +10 °C to suit both meat and dairy storage requirements.
- Simple control panel: on/off switch, high/low humidity switch and digital temperature display.
- Automatic defrost and automatic evaporation of defrost water.
- Ventilated cooling for optimal temperature distribution.
- Simple cooling unit easily accessible from the rear of the appliance.
- Inner side protectors to protect the internal walls.
- Suitable for all kinds of 18 shelves GN 1/1 trolleys, designed to fit the 18 shelves GN 2/1 trolley available as optional accessory.
- Adjustable bottom door gasket.
- Lift-up control panel to better access main components.

### Construction

- Built-in compressor to suit operating conditions.
- Interior cell and external panel are constructed in 304 AISI stainless steel.
- Bottom panel with rounded internal corners avoids dirt traps.
- Refrigerant type: R134a.
- Developed and produced in ISO 9001 and ISO 14001 certified factory.
- Cabinet fitted with up to 60 mm thickness of Cyclopentane insulation for best insulating performance (thermal conductivity: 0,020 W/m\*K). CFC and HCFC-free insulation.

### Optional Accessories

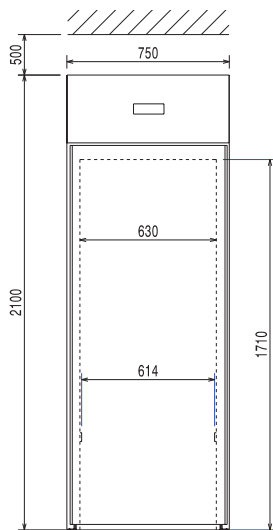
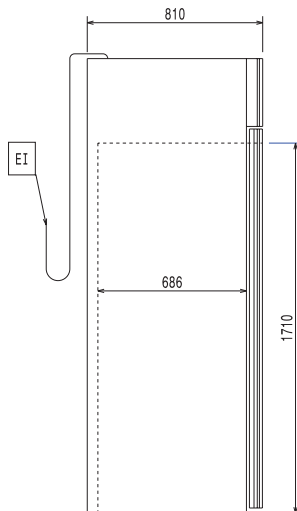
- Trolley 18x2/1GN for roll-in 750lt  PNC 881521

APPROVAL: \_\_\_\_\_

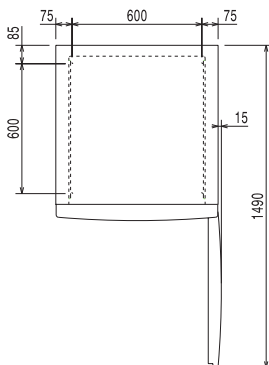


Electrolux

Roll-in Compact Refrigerator 750 lt - 1 door  
Digital Cabinets

**Front**

**Side**


EI = Electrical inlet (power)  
 RI = Refrigerant Inlet  
 RO = Refrigerant Outlet

**Top**


#### Electric

Supply voltage:

726650 (RI075R1F)

230 V/1 ph/50 Hz

#### Key Information:

Door hinges:

External dimensions, Width: 750 mm

External dimensions, Height: 2100 mm

Number and type of doors: 1 Full

External side panels: 304 AISI

External top panels: Galvanized Steel

External door material: 304 AISI

Internal panels material: 304 AISI

#### Refrigeration Data

Compressor power: 3/8 hp

Refrigerant type: R134a

Refrigeration power: 523 W

Refrigerant weight: 260 g

Operating temperature min.: 0 °C

Operating temperature max.: 10 °C