

**Refrigeration Equipment
Reach-In Refrigerator, 72 cu.ft
- Stainless Steel**

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



738102 (KCBM72RSE-HC) 3-door reach-in refrigerator, stainless steel, 72 cubic feet, R290 refrigerant gas, 0/+5°C

Short Form Specification

Item No. _____

3-Full door refrigerator with internal structure in 304 AISI stainless steel and external structure in 430 AISI stainless steel.
Digital control with cabinet temperature display.
Self-closing doors equipped with lock and key.

R290 gas in the refrigeration circuit.
ETL Safety and Sanitation certifications.
3/5 Years warranty.

Main Features


- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- 3/4 HP Compressor.
- Electronic Digital Temperature Control: quick set digital control and display for easy monitoring.
- External temperature display.
- Heavy duty adjustable, easy to handle and clean shelves.
- Self-closing door with 90-degree stay-open feature.
- Lock & Key protects the contents of the unit.
- Hydrocarbon refrigerant gas R290 for the lowest environmental impact (GWP=3) - CFC and HCFC free.

Construction


- Durable and easy to clean for daily commercial use thanks to stainless steel exterior & interior.
- Removable door gasket.
- Heavy duty casters.

APPROVAL: _____

Front

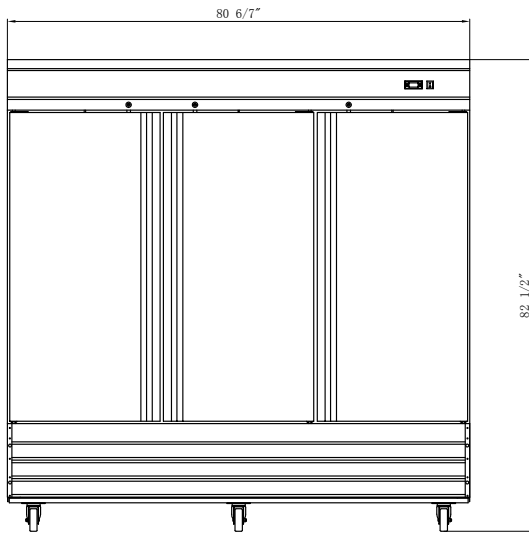


Side

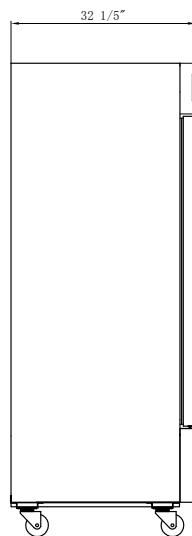

EI = Electrical connection
RI = Refrigerant Inlet
RO = Refrigerant Outlet

Top

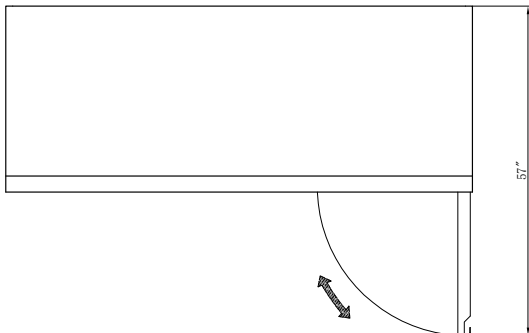

Electric

Supply voltage:

738102 (KCBM72RSE-HC) 115 V/1 ph/60 Hz

Electrical power, max:

1.2 kW

Plug type:

USA NEMA 5-15P

Key Information:

Capacity (Cu.Ft.)

72

Door hinges:

External dimensions, Width: 80 7/8" (2053.77 mm)

External dimensions, Depth: 32 3/16" (817.88 mm)

External dimensions, Height: 82 1/2" (2095.5 mm)

Number and type of doors: 3 Full

Number and type of grids (included):

9 - Vinyl-Coated Steel

Type of external material:

430 AISI

Type of internal material:

304 AISI

Warranty:

3 / 5 years

Refrigeration Data

Compressor Horsepower:

3/4

Refrigerant type:

R290

Operating temperature min.:

33 °F

Operating temperature max.:

41 °F

Condenser type:

Fin & tube

Defrost type:

Auto Defrost